

### Ultra Acrylic Inward Swing Door Walk-In Bathtub Specifications

**Actual Size:** 30" x 52" x 40" •

Seat Width: 21" ·

Net Weight: 205 lbs. • (92.98 kg)

**Shipping Size:** 32" x 54" x 50" • (81.28 cm x 137.16 cm x 127 cm)

Shipping Weight: 230 lbs. · (104.32 kg)

Unoccupied Water Capacity: 75 gal. • (284 L)

Occupied Water Capacity: 35-55 gal. • (132 - 208 L)

Drainage Time: +/- 80 seconds at ideal plumbing conditions

(unoccupied)

### **Included Features with Soaking Option:**

- 1. Acrylic Tub Shell
  - ·Gloss white finish
  - ·Fiberglass gelcoat reinforced
- 2. Stainless-Steel frame with adjustable leveling Legs.
- 3. Inward swinging S-Shaped brushed stainless-steel door with a frosted tempered glass.
- 4. Removable front apron with two access panels.
- 5. One (1) removable and reversible end panel.
- 6. Extension Panel (reversible) for 60" alcove openings.
- 7. Stainless steel chrome finish U-shape deck and wall mount grab
- 8. One (1) 16" Long Stainless-Steel Towel Bar
- 9. Two (2) 2-inch PVC drains with 2 end caps included. Each drain has two (2) 2-inch outlets, one overflow and a stainless steel operated opener with extended handle in chrome finish.

### **Jetting & Therapy Options:**

- 1. Air + Hydro (Multicolor LED Light Included)
- 2. Hydro + Hydro Independent Foot Massage (Multicolor LED Light Included)
- 3. Hydro Massage (Multicolor LED Light Not Included)
- 4. Hydro Massage + Microbubble (Multicolor LED Light Included)
- 5. Soaking Option Only (Multicolor LED Light Not Included)



### **Jetting Options**

### **Hydro Massage**

- ·Hydro Massage Pump
- ·Hydro Massage Intensity Dial Control
- ·Ozone Sterilization
- ·16 jets
- ·On/Off Push Control
- · In-line Water Heater

### Air Massage

- ·Air Massage Pump
- ·3 Speed Pump
- ·Auto-purge (Activates 20 minutes after pump shutdown)
- 16 iets
- ·On/Off push control

1. Heated Seat and Backrest

**Optional Features** 

2.Digital Controller

### **Hydro + Hydro Foot Massage**

- ·2 Hydro Massage Pumps
- •2 Hydro Massage Intensity Dial Controls
- ·Ozone Sterilization
- ·16 jets
- ·On/Off push control
- ·In-Line Water Heater

### **Microbubble Therapy**

- ·Air Pressure Pump
- ·Pressure Tank
- ·On/Off push control

### **Electrical Requirements**

Dedicated GFCI protected electrical line(s)required

**Note:** Multicolor LED light with On/Off push control is included with the following dual packages: Hydro + Air, Hydro + Micro, Hydro + Hydro

Disclaimer\*: AMP value for each pump may change based on availability. Please verify before purchase. (800.480.6850)

### **Faucet Options**

### 1.Five-Piece Fast Fill Faucet

- •Up 10 18 GPM @ 60 PSI an ideal in-home plumbing conditions
- •Two 5' water supply lines with 3/4" connectors
- •Pull out, hand held, chrome plated hand shower with a 5' ft. retractable stainless steel braided hose

### 2.Two-Piece Fast Fill Faucet


- •Up 10 16 GPM @ 60 PSI an ideal in-home plumbing conditions
- •Two 5' water supply lines with 3/4" connectors
- •Pull out, hand held, chrome plated hand shower with a 5' ft. retractable stainless steel braided hose


### Warranty

- · Lifetime limited\* warranty on shell, frame, door, and parts to original purchaser/Address
- · Labor or installation is not covered please refer to the Ella warranty certificate
- · Non Ella brand faucets covered under manufacturers original warranty




## Ultra Acrylic Inward Swing Door Walk-In Bathtub Specifications

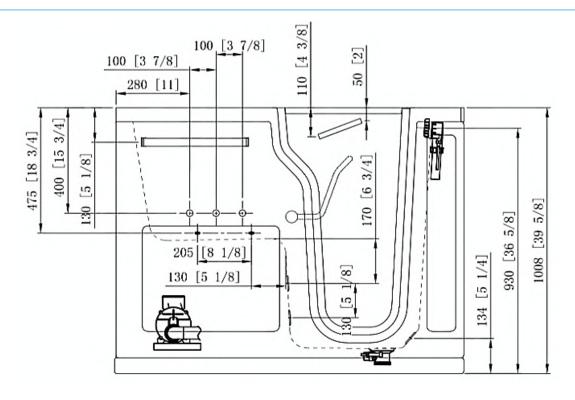


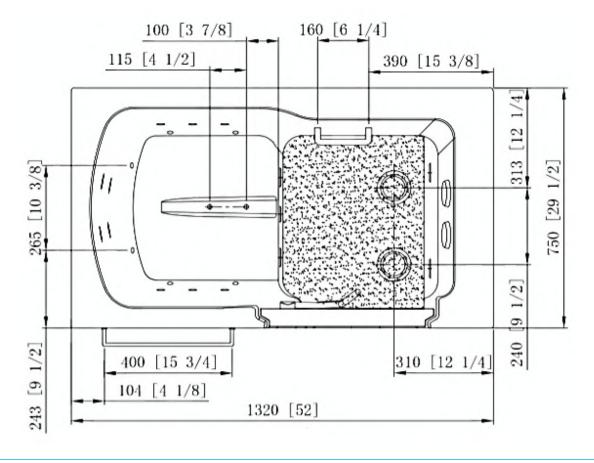




## Ultra Acrylic Inward Swing Door Walk-In Bathtub Specifications

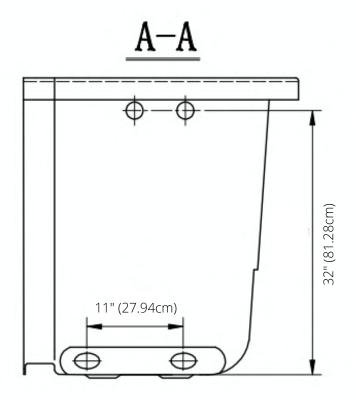

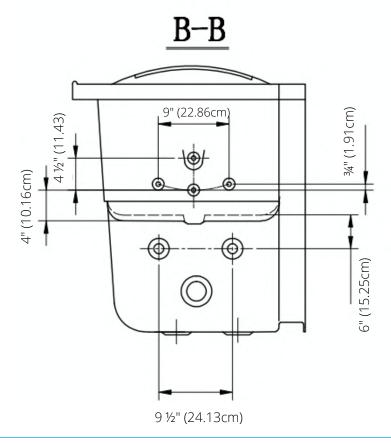



# Ella 2" T-type Dual Port Floor Drain (Two Drains Included)

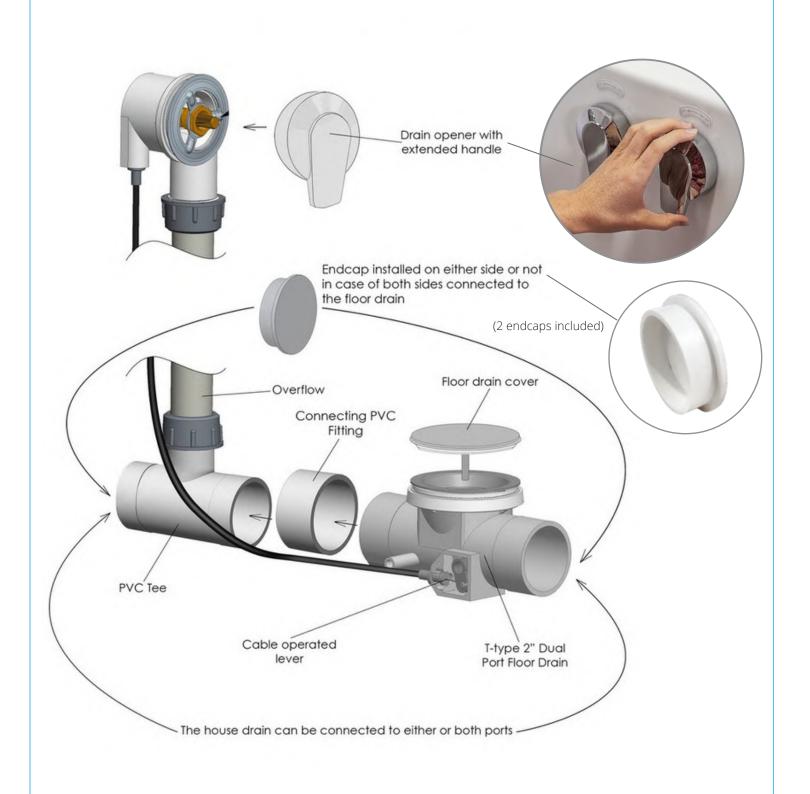



## Supply Lines, Electrical Connection, & Drain Options

Two 3/4" connector water supply lines included with Ella Fast Fill Faucets



Connect to Shut Off Valves (not included)





All electrical fixtures connect to a dedicated GFCI protected outlet.




Use a drain cap to close unused drain port.



T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.

Images below show examples of PVC pipe connections (not included). Reducers can be used to connect smaller drain pipes.

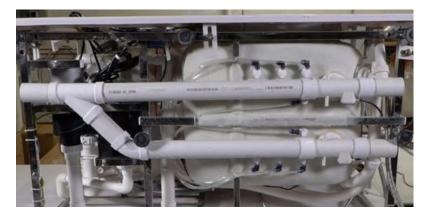





## Ella 5 Piece Single Lever Fast-Fill Faucet

### **Description**

Solid brass spout in a chrome finish with a 5-setting pull out hand shower mixer including a 5' braided hose. Two 3/4" 5' braided stainless-steel supply lines are included along with Cold/Hot levers with a diverter for the hand mixer.

### **Flow**


- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 18 GPM (68.1L/min)

### Cartridge

- · 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material




### Ella 5 Piece Fast-Fill Faucet Contents

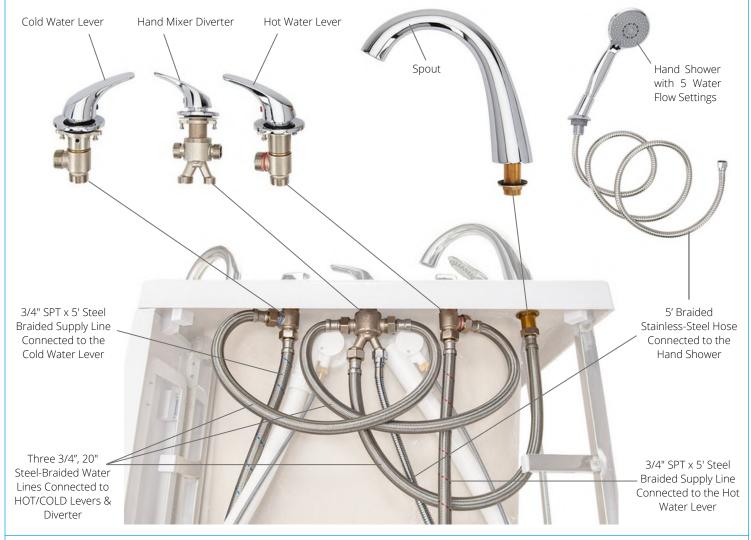



# Ella 5 Piece Single Lever Fast-Fill Faucet

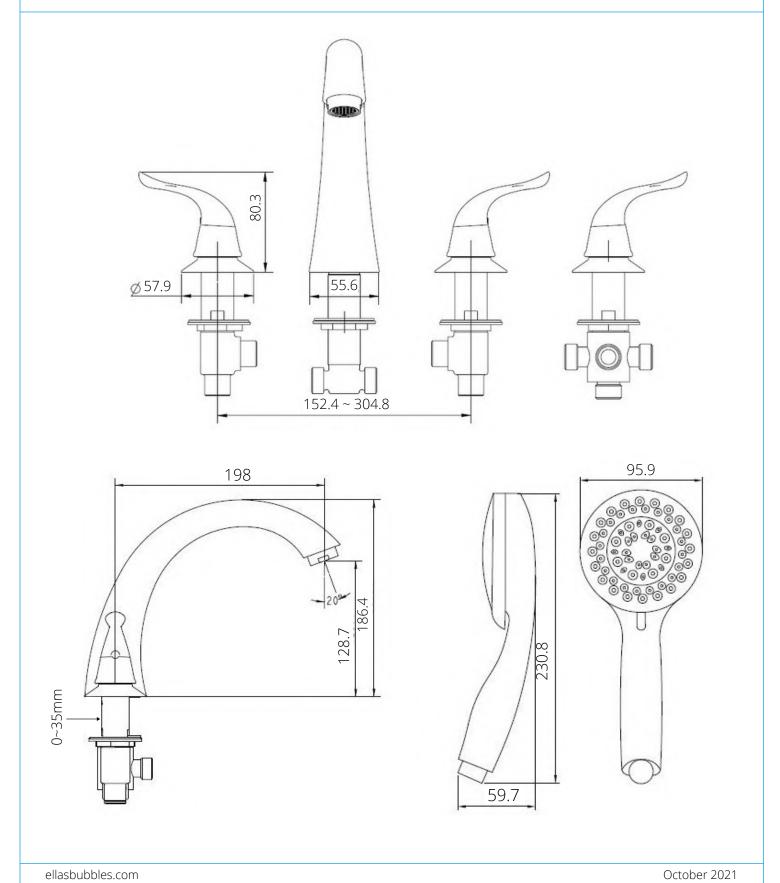



# Ella 2 Piece Single Lever Fast-Fill Faucet

### Description

Solid brass spout chrome finish single lever high flow bathtub faucet with diverter button Two (2) 3/4" 5' braided stainless-steel supply lines Pull out hand shower mixer with 5 settings and 5' braided hose in a Chrome or Brushed Nickel finish.

#### Flow

- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 16 GPM (68.1L/min)

### Cartridge

- · 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

### **Standards**

- Third party certified to meet: CSA B125.1, ASMEA112.18.1, ICC117.1 and all applicable requirements referenced therein
- · Certified to ANSI/NSF 61/9
- · ADA for lever/handle
- · IAPMO R&T UPC certified





**NOTE:** This faucet is designed to be installed through:

2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, and a 7/8" diagonal hole for the hand shower.

