


Barrier Free, Roll In Shower 60" x 60"

Ella Plus 36 - Center Drain

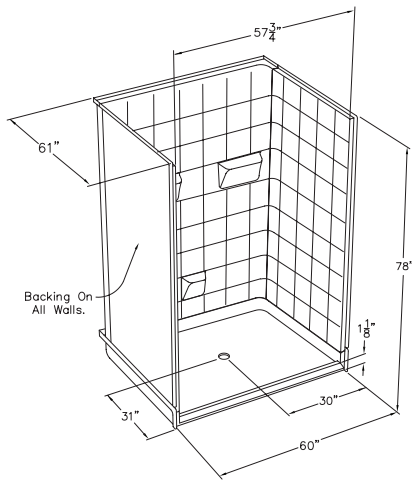

**Flat
Wall
Option**

Model

6060 BF 5P 1.125C-WH SP36
6060 BF 5P 1.125C-BN SP36
6060 BF 5P 1.125C-B SP36

Ella Plus 36 Accessories (page 2):


Hansgrohe & Ponte Giulio are optional

hansgrohe

German Engineering

PONTE GIULIO®
creating solutions

Italian Design

Outside Dimensions: 60" W x 61" L x 78" H
Shipping Dimensions: 60" W x 48" L x 72" H
Shipping Weight: 576 lbs.
Net Weight: 563 lbs.
Threshold Height: 1.125" Change of Level 

Package Options:

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Standard, Plus 24, Plus 36, Freedom, Deluxe, or Elite (premium fixtures in white, brilliant or satin)
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit
- Flat Wall Option: no soap ledges

Panels:

Shower Base 61" W x 60" L x 3.5" H
Side Wall Panel Left 61" W x 78" H
Side Wall Panel Right..... 61" W x 78" H
Rear Wall Panel Top..... 60" L x 34" H
Rear Wall Panel Bottom 60" L x 44" H

Features:

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern
- Wood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure™ floor texture
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installation)
- Ships pre-assembled, heavy duty crating protects product in transit

Accessories:

- [1] Three (3) 36" Fine Finished Stainless Steel Grab Bars
- [2] 24" x 16" Four-Legged Foldup Seat, 500 lb. cap
- [3] 2" Chrome strainer brass drain with friction seal
- [4] Collapsible Dam Kit

Codes:

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA

Warranty:

30 Year Limited Lifetime Warranty (on shower panels)*

*For more information please visit www.ellasbubbles.com

 Change of Level threshold has manageable 1/4" vertical rise to easily coordinate with minimum finished flooring.

Barrier Free, Roll In Shower 60" x 60"

Ella Plus 36 Accessories

1.



Fine Brushed Stainless Steel
Concealed Flange Grab Bars

2.




Four Legged Foldup Seat
(500 lbs. Weight Capacity)

3.















2" Chrome Strainer
Brass Drain with Friction Seal

4.


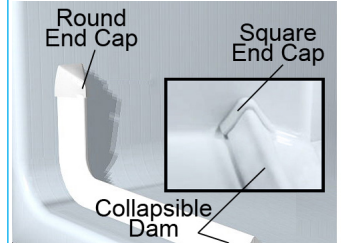


Collapsible Rubber Dam
White PVC with End Caps




Barrier Free, Roll In Shower 60" x 60"


6060 BF 5P 1.125 - Center Drain

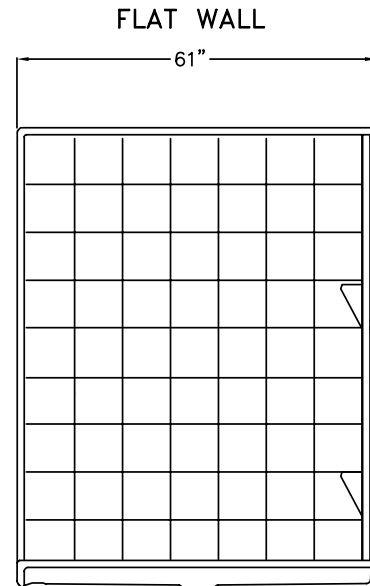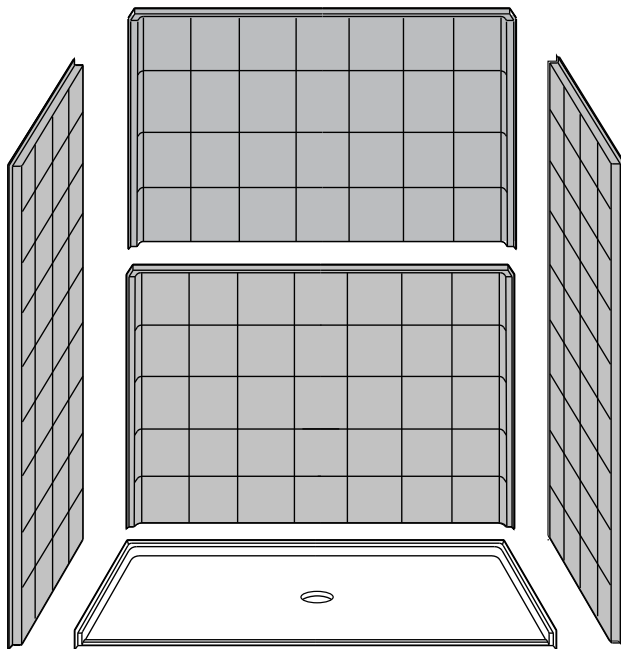


FRONT VIEW

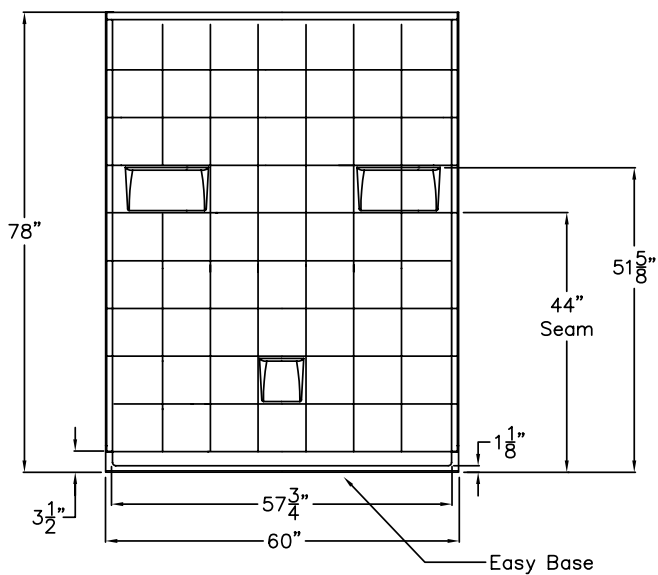

TOP VIEW

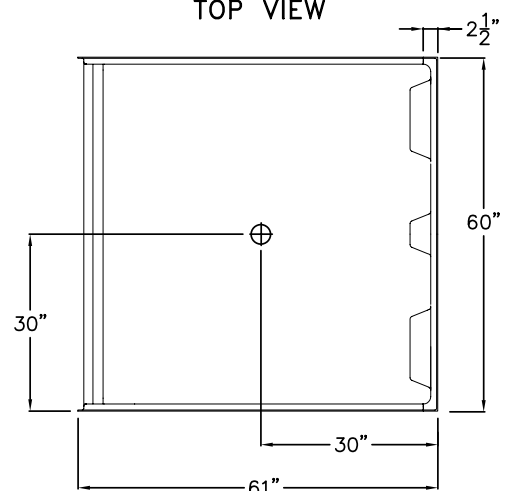

Detail of 1 1/8" Threshold

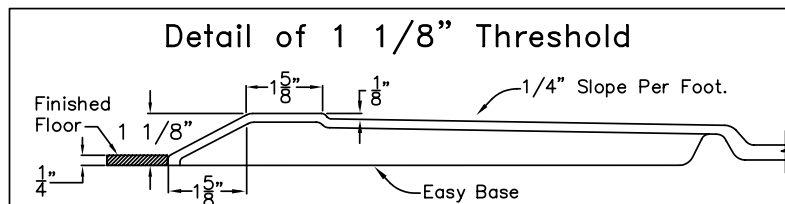

Barrier Free, Roll In Shower Features

STRENGTH

Wood & Steel Reinforced Walls



Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base. Metal conduit around perimeter of EACH panel for added strength.

ADAPTABILITY

Customized Accessory Placement

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.



SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.

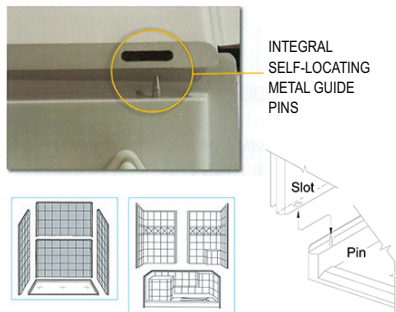


Image for illustration only

FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.



AVAILABILITY

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).


No order is too big or small.

SMART PACKING

Multi-piece Shower in a Box



In stock for Rapid Ship

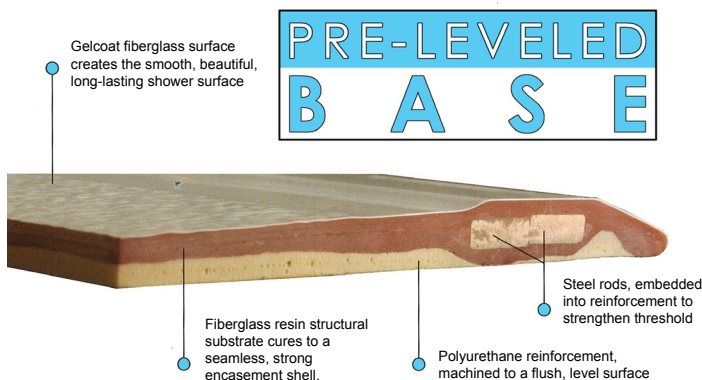

Barrier Free 1 1/8"

