

Barrier Free, Roll In Shower 62" x 38" **Ella Deluxe Kit** - Center Drain



ADA Certified

Model#

6238 BF 5P .75 C-W DLX 6238 BF 5P .75 C-B DLX 6238 BF 5P .75 C-BN DLX

Outside Dimensions: 38.25" W x 62.625" L x 79" H Shipping Dimensions: 60" W x 48" L x 72" H

Shipping Weight: 492 lbs. Net Weight: 442 lbs.

Threshold Height: 3/4" Change of Level L

Package Options:

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Plus 24, Plus 36, or Deluxe
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit

Panels:

Shower Base	. 38.25" W x 62.625" L x 3.5" H
Side Wall Panel Left	. 38.25" W x 79" H
Side Wall Panel Right	. 38.25" W x 79" H
Rear Wall Panel	62 625" L x 79" H

Features:

- Premium marine grade gel-coat, five piece shower with classic tile pattern
- Wood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure[™] floor texture
- Molded soap ledges
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installation)
- Ships pre-assembled, heavy duty crating protects product in transit

Warranty:

30 Year Limited Lifetime Warranty (on shower panels)*

*For more information please visit www.ellasbubbles.com

Accessories:

The accessories are shipped loose to be installed in the field

- [5] Three (3) Straight Fine Brushed Stainless Steel Grab Bars (Two (2) 36" and One (1) 18")
- [9] 24" x 16" Four-Legged Foldup Seat, 500 lb. cap
- [11] Fine Brushed Finish Stainless Steel Curtain Rod
- [12] Collapsible Rubber Dam White with End Caps
- [13] 2" Chrome Strainer, Brass Drain with Friction Seal
- [14] 66" x 74" Heavy Weighted Shower Curtain

Hansgrohe:

- [1] Hand Shower, Chroma E75 3 Jet
- [2] Vinyl Techniflex Hose
- [3] Wall Outlet Elbow in Chrome
- [4] Hand Shower Alternate Wall Mount in Chrome
- [7] HG Focus E Pressure Balance Valve
- [8] Interchangeable iBox Universal Plus

Ponte Giulio:

- [6] Ergonomic Hand Shower Holder ABS Chrome
- [10] Rectangular Stainless Steel Soap-Sponge Basket



Codes

ADA, IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA, MAS, TAS

L Change of Level threshold has manageable 1/4" vertical rise to easily coordinate with minimum finished flooring.





Barrier Free, Roll In Shower 62" x 38" **Ella Deluxe Kit** Accessories








Barrier Free, Roll In Shower 62" x 38" 6238 BF 5P .75 - Center Drain







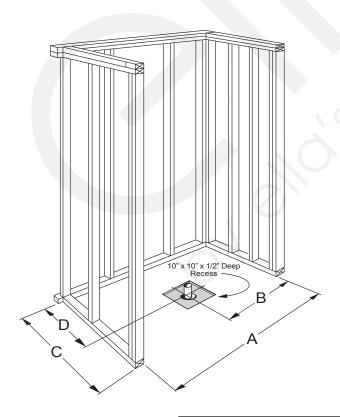



Α	В	С	D
62 7/8"	31 7/16"	38 1/4"	19 1/4"

Disclaimer:
In an effort to continually improve our product, specifications and configurations are subject to change without notice. Before ordering or installing, consider future access to essential equipment. Due to the nature of the materials, dimensions may vary ± 1/2".



Barrier Free, Roll In Shower Features

STRENGTH Wood & Steel Reinforced Walls All wall panels Metal conduit around the are backed perimeter for unmatched with 3/8" wood strength accessories can be installed Fiberglass resin structural anywhere, substrate cures to a seamless any time strong encasement Premium Marine-grade Polyurethane Gel-coat fiberglass surface reinforcement for beautiful, long-lasting machined to a shower surface flush, level surface High density


Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base. Metal conduit around perimeter of EACH panel for added strength.

ADAPTABILITY

Customized Accessory Placement

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.



SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

AVAILABILITY Your Project won't be held up

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.



Image for Illustration only

FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.



INTEGRAL SELF-LOCATING METAL GUIDE

structural foam



Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.


Rush orders are available upon request (white only).

No order is too big or small.

SMART PACKING Multi-piece Shower in a Box



In stock for Rapid Ship

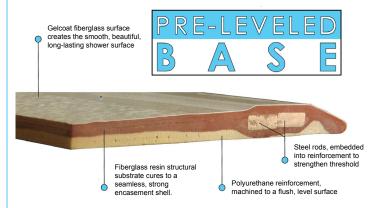

Barrier Free 3/4"