

Actual Size: 29 1/2" W x 52" L x 37.5" H

Seat Width: 20"

Seat Length: 15"

Shipping Size: 32x54x49

Shipping Weight: 310 lbs. (140.614kg)

Net Weight: 210 lbs. (95.2544kg)

Water Capacity: 65 gal. (246.052L)

Occupied: 30-50 gal. (113.562L- 189.271L)



## Product Features

### Jetting System

#### 1. Hydro Massage System

- Hydro Massage Pump 8.1AMP 900W
- Hydro massage intensity dial air control
- In-line water heater 6AMP 650W
- 17 jets
- Push control

### 2 Piece Single Lever Fast-Fill Faucet

Up to 18 GPM @ 60 PSI at ideal in home plumbing conditions

Supply lines

Pull out, hand held, chrome plated hand shower with 5 ft. retractable stainless steel braided hose

### Included Features

#### 1. Acrylic Tub Shell:

- Gloss White Finish
- Fiberglass Gelcoat Reinforced

#### 2. Stainless Steel Frame with Adjustable Leveling Legs

#### 3. Inward swing acrylic U-shape door

#### 4. Two (2) front and one (1) end reversible, removable access panel

#### 5. Stainless steel chrome finish U-shape deck & wall mount grab bar

#### 6. Extension panel, filler for 60" alcove installations

#### 7. Stainless Steel Brushed Finish Towel Bar

### Optional Features

Heated Seat and Backrest 4AMP 47

### Electrical Requirements:


One (1) dedicated 110/120V 60HZ electrical line with a 20AMP/120V GFCI standard three prong outlet is required


### Warranty

- Lifetime limited\* warranty on shell, frame, door and parts to original purchaser
- Labor or installation is not covered – please refer to Ella warranty certificate
- Non-Ella brand faucets covered under manufacturers original warranty

### Floor Drains

One (1) 2" PVC Drain and one (1) overflow and emergency pull-up chain



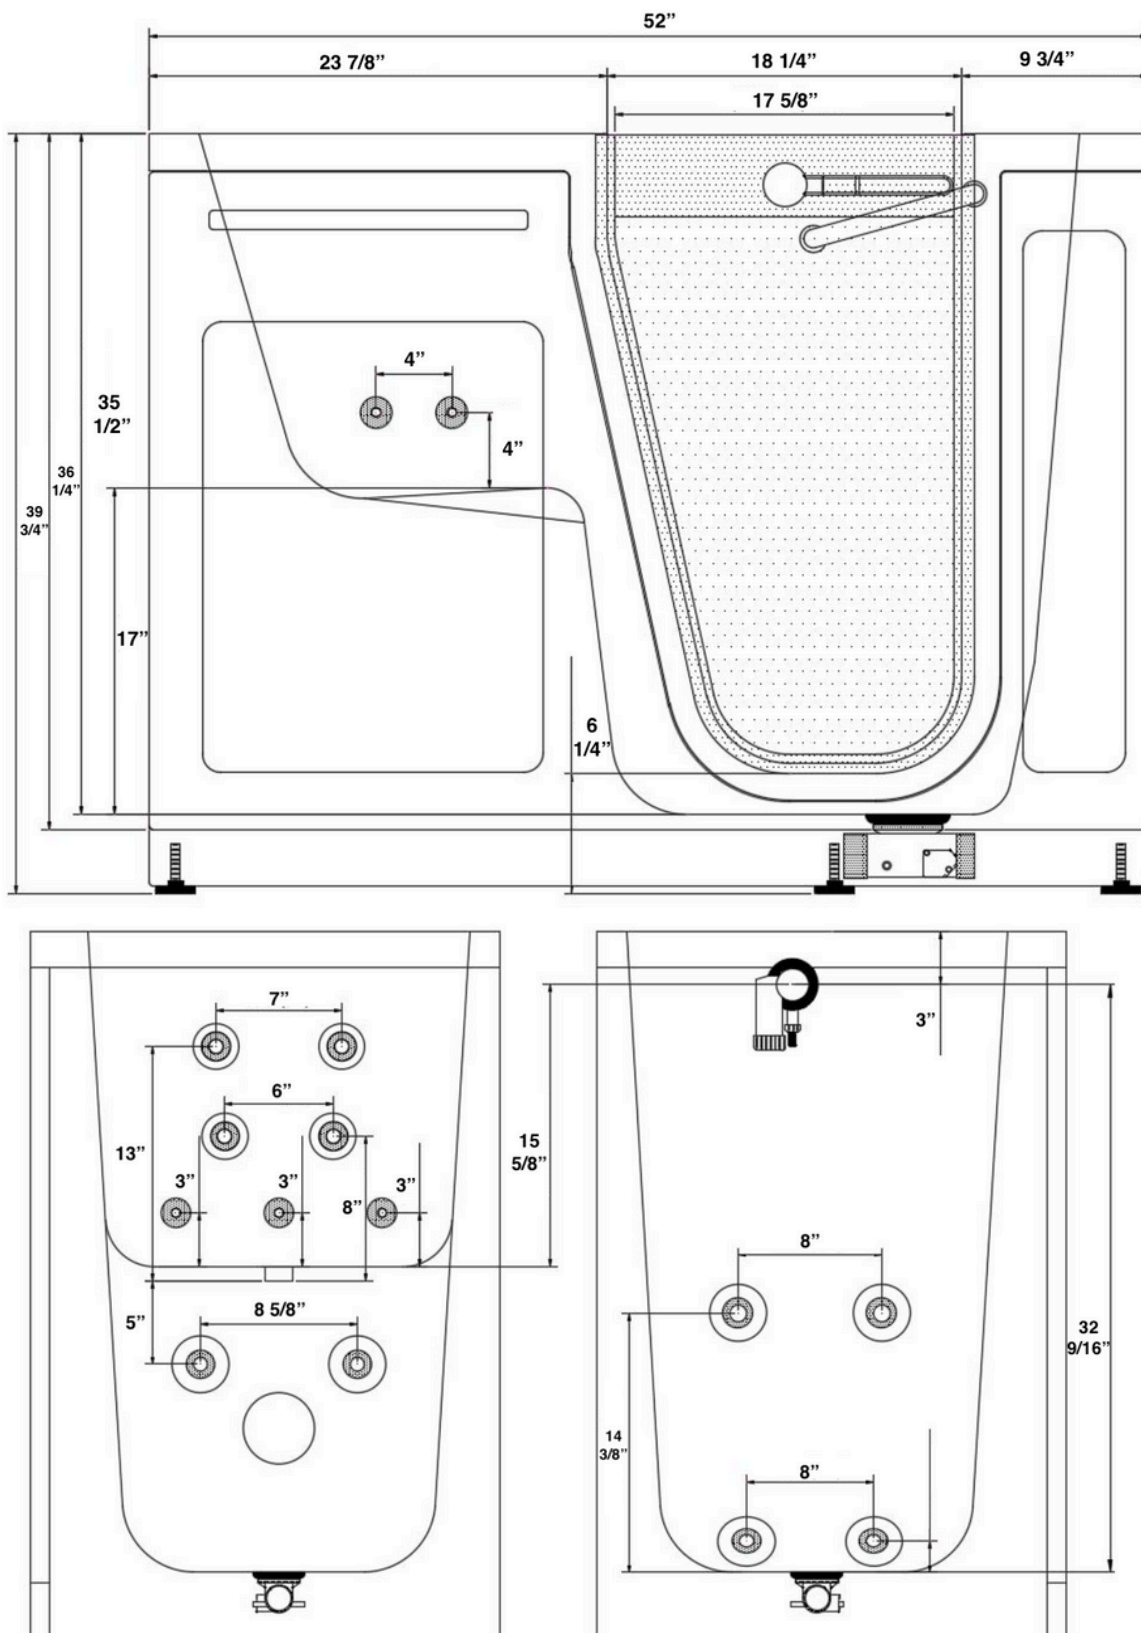

## Two 3/4" connector water supply lines included with Ella Fast Fill Faucets

Connect to Shut Off Valves (not included)




All electrical fixtures connect to a dedicated GFCI protected outlet or GFCI protected Circuit Breaker.



Images below show examples of PVC pipe connections (not included). Reducers can be used to connect smaller drain pipes.

T-Type four (4) 2" drain ports allow Drain Caps Installed On Either Side Of The Drain unused Port. direction.

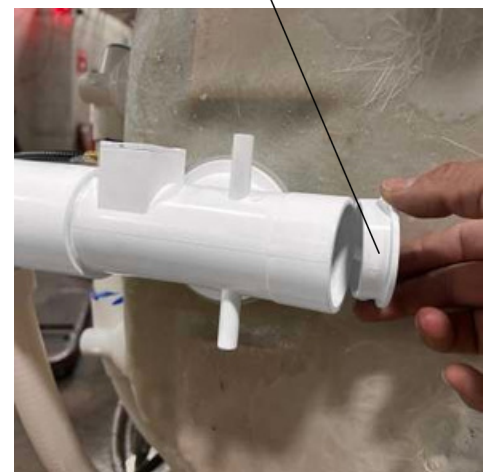

### Description

Solid brass spout chrome finish single lever high flow bathtub faucet with diverter button Two (2) 3/4" 5' braided stainless- steel supply lines. Pull out hand shower mixer with back-flow prevention valve 5 settings and 5' braided hose in a Chrome or Brushed Nickel finish.

### Flow

- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 16 GPM (68.1L/min)

### Cartridge

- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

### Standards

- Third party certified to meet: CSA B125.1, ASMEA112.18.1, ICC117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever/handle
- IAPMO R&T UPC certified



NOTE: This faucet is designed to be installed through 2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, and a 7/8" diagonal hole for the hand shower.

