Ella Zen Acrylic Inward Swing Door Walk In Bathtub Specifications

Actual Size: 29 1/2" W x 52" L x 37.5" H

Seat Width: 20"

Seat Length: 15"

Shipping Size: 32x54x49

Shipping Weight: 310 lbs. (140.614kg)

Net Weight: 210 lbs. (95.2544kg)

Water Capacity: 65 gal. (246.052L)

Occupied: 30-50 gal. (113.562L- 189.271L)



Product Features

Jetting System

1.Hydro Massage System

- Hydro Massage Pump 8.1AMP 900W
- Hydro massage intensity dial air control
- In-line water heater 6AMP 650W
- 17 jets

Push control

2 Piece Single Lever Fast-Fill Faucet

Up to 18 GPM @ 60 PSI at ideal in homeplumbing conditions

Supply lines

Pull out, hand held, chrome plated hand shower with 5 ft. retractable stainless steel braided hose

Included Features

1. Acrylic Tub Shell:
   - Gloss White Finish
   - Fiberglass Gelcoat Reinforced
2. Stainless Steel Frame with Adjustable Leveling Legs
3. Inward swing acrylic U-shape door
4. Two (2) front and one (1) end reversible, removable access panel
5. Stainless steel chrome finish U-shape deck & wall mount grab bar
6. Extension panel, filler for 60" alcove installations
7. Stainless Steel Brushed Finish Towel Bar

Optional Features

Heated Seat and Backrest 4AMP 47

Electrical Requirements:

One (1) dedicated 110/120V 60HZ electrical line with a

20AMP/120V GFCI standard three prong outlet is required

Floor Drains

One (1) 2" PVC Drain and one (1) overflow and emergency


pull-up chain

Warranty

- Lifetime limited* warranty on shell, frame, door and parts to original purchaser
- Labor or installation is not covered – please refer to Ella warranty certificate
- Non-Ella brand faucets covered under manufacturers original warranty


Ella Zen Acrylic
Inward Swing Door
Walk In Bathtub Specifications

RIGHT Door, drain and faucet on the right (as you face the tub)

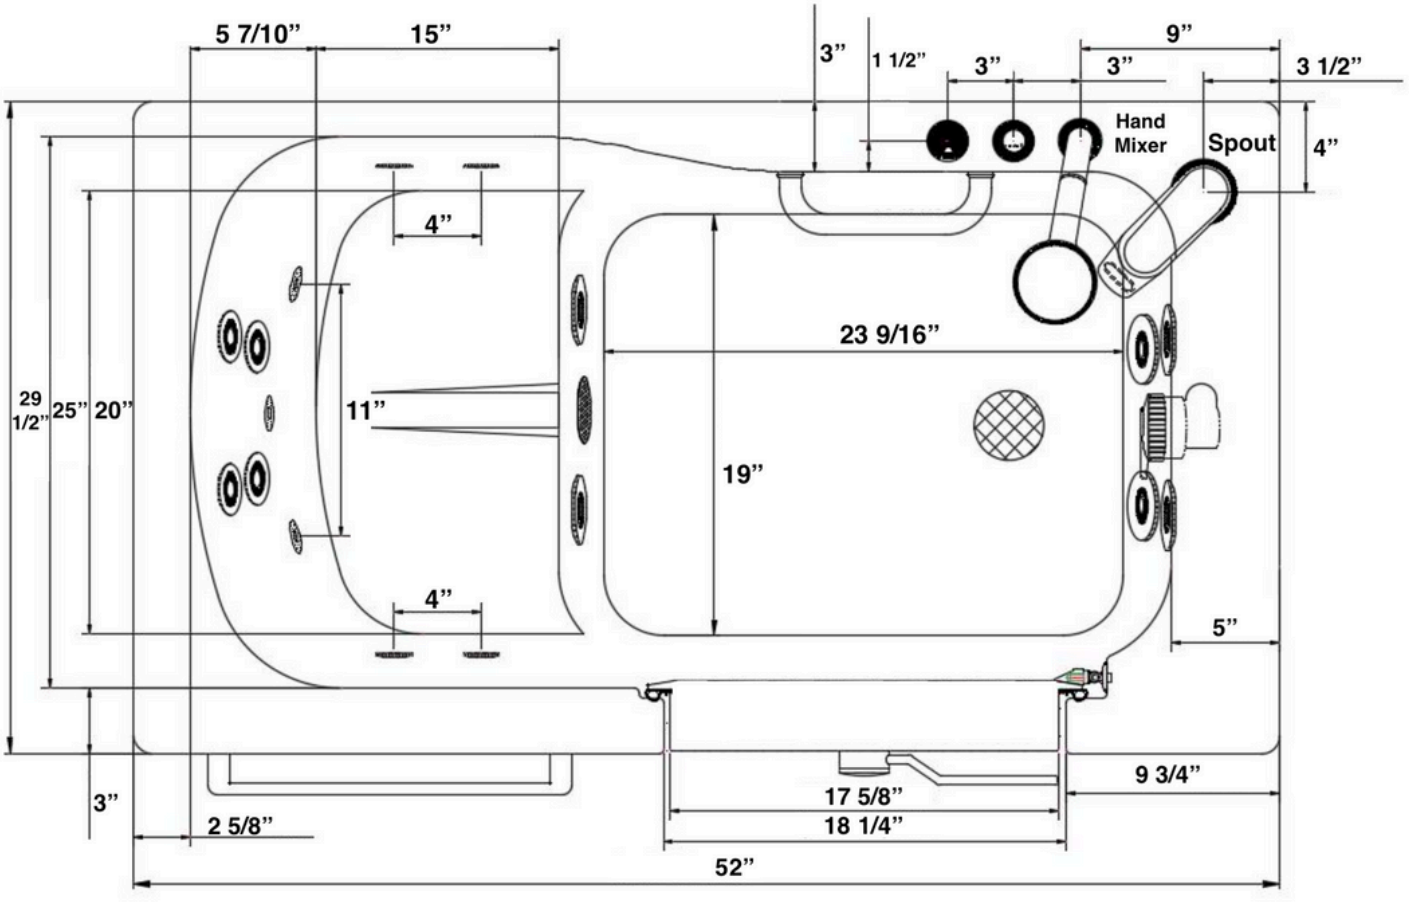

Ella Zen Acrylic Inward Swing Door Walk In Bathtub Specifications

RIGHT Door, drain and faucet on the right (as you face the tub)

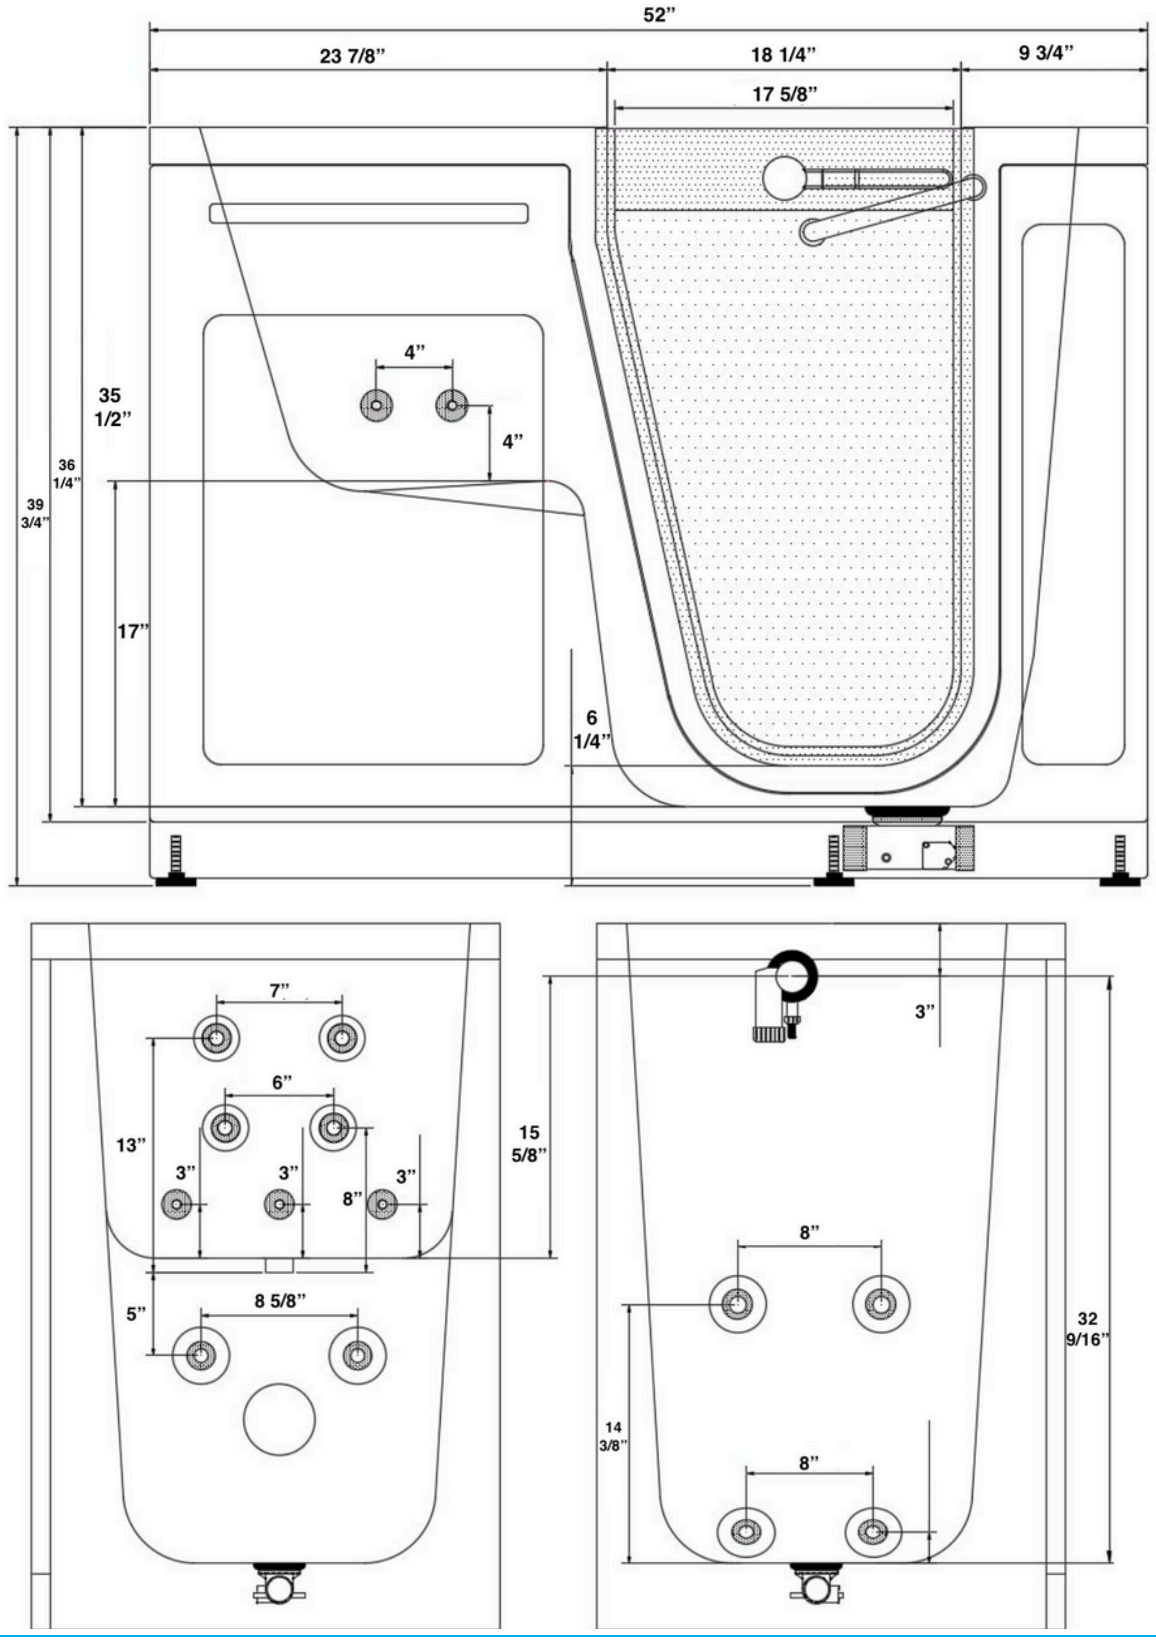

Two 3/4" connector water supply lines included with Ella Fast Fill Faucets

Connect to Shut Off Valves (not included)







All electrical fixtures connect to a dedicated GFCI protected outlet or GFCI protected Circuit Breaker.









Images below show examples of PVC pipe connections (not included). Reducers can be used to connect smaller drain pipes.

T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.

Drain Caps Installed On Either Side Of The Drain unused Port.







Ella Zen
2 Piece Single Lever Fast-Fill Faucet

Description
Solid brass spout chrome finish single lever high flow bathtub faucet with diverter button Two (2) 3/4" 5' braided stainless- steel supply lines. Pull out hand shower mixer with back-flow prevention valve 5 settings and 5' braided hose in a Chrome or Brushed Nickel finish.

Flow

- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 16 GPM (68.1L/min)

Cartridge

- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

Standards

- Third party certified to meet: CSA B125.1, ASMEA112.18.1, ICC117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever/handle
- IAPMO R&T UPC certified



NOTE: This faucet is designed to be installed through 2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, and a 7/8" diagonal hole for the hand shower.

