Front Entry Acrylic Outward Swing Door Walk-In Bathtub Specifications

Actual Size: 32" x 40" x 40" • (815.34cm x 101.6cm x 101.6cm)

Shipping Size: 35" x 43" x 43" • (88.9cm x 109.22cm x 109.22cm)

Net Weight: 200lbs • (90.8kg)

Shipping Weight: 280lbs • (127kg)

Seat Width: 25" • (63.5cm)

Unoccupied Water Capacity: 70gal • (265L)

Occupied Water Capacity: 25-55gal • (94.6 - 208.2L)

Included Features (Soaking)

1. Acrylic shell gloss white finish fiberglass gelcoat reinforced
2. Stainless steel frame with adjustable leveling legs
3. Plastic composite and tempered glass outward swing door with 3 latch gear & shaft mechanism
4. Two (2) Access Side Panels
5. Single 2" 2-port PVC drains with 1 end caps included, 2 overflows, 2 stainless steel operated openers with extended handles in chrome finish

Jetting & Therapy Options

1. Air + Hydro (LED Chromatherapy Light Not Included)
3. Hydro Massage + Microbubble (LED Chromatherapy Light Not Included)
4. Hydro Massage (LED Chromatherapy Light Not Included)
5. Soaking



Jetting & Therapy Systems

Hydro Massage

•Hydro Massage Pump 7A
•Intensity Dial Air Control
•Ozone Sterilization 0.04A
•13 jets (11 Seat Jets 2 Calf Jets)
•On/Off Push Control
• In-line Water Heater 6A 650W

Microbubble Therapy

•1 HP Pump 7.3A
•Pressure Vessel
•On/Off push control
•Agitator Valve

2 Piece Faucet

• Up to 16GPM @ 60PSI (at ideal in-home plumbing conditions)
• Two 5' Water Supply Lines 3/4"
• Pull out Hand Shower in Chrome Finish with a 5' Retractable Stainless Steel Braided Hose

Air Massage

•Air Massage Pump 4.5A 500W
•3 Speed Pump
•Auto-purge (Activates 20 minutes after pump shutdown)
•16 jets (10 Seat Jets 6 Foot Jets)
•On/Off push control

Optional Features

1.Heated Seat and Backrest

2.Digital Controller

Electrical Requirements


Dedicated GFCI protected electrical line(s)required 110/120V 60Hz


Disclaimer*: AMP value for each pump may change based on availability. Please verify before purchase. (800.480.6850)

Warranty

• Lifetime limited* warranty on shell, frame, door, and parts to original purchaser/Address
• Labor or installation is not covered - please refer to the Ella warranty certificate
• Non Ella brand faucets covered under manufacturers original warranty


LEFT Door, drain and faucet on the left (as you face the tub)

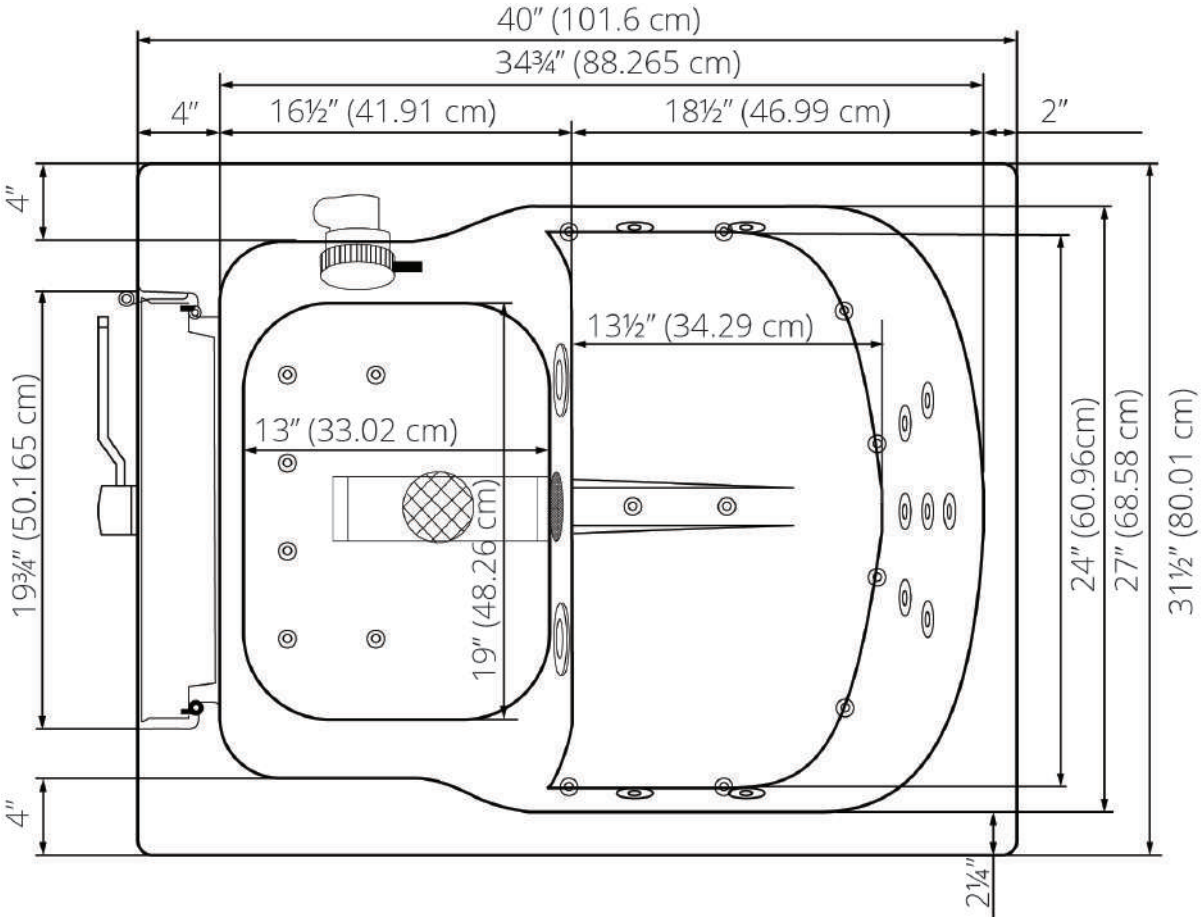


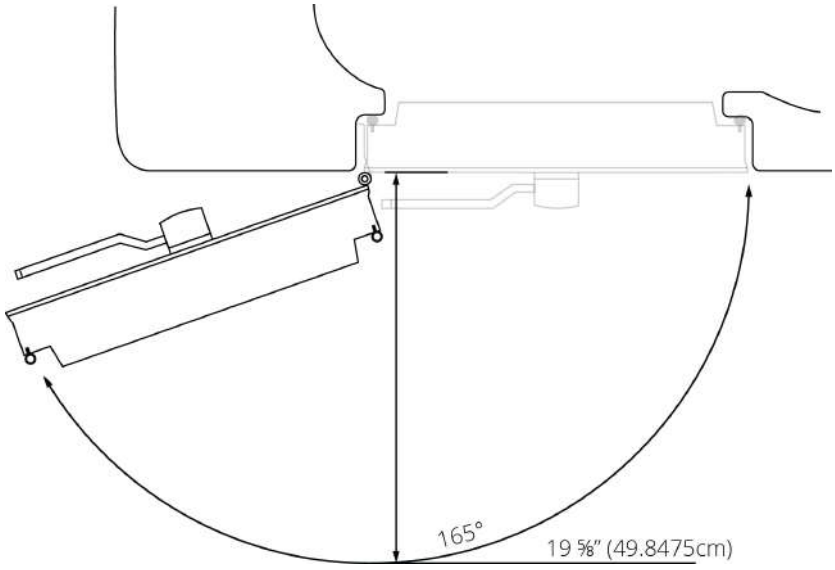

Front Entry Acrylic Outward Swing Door Walk-In Bathtub Specifications

LEFT Door, drain and faucet on the left (as you face the tub)

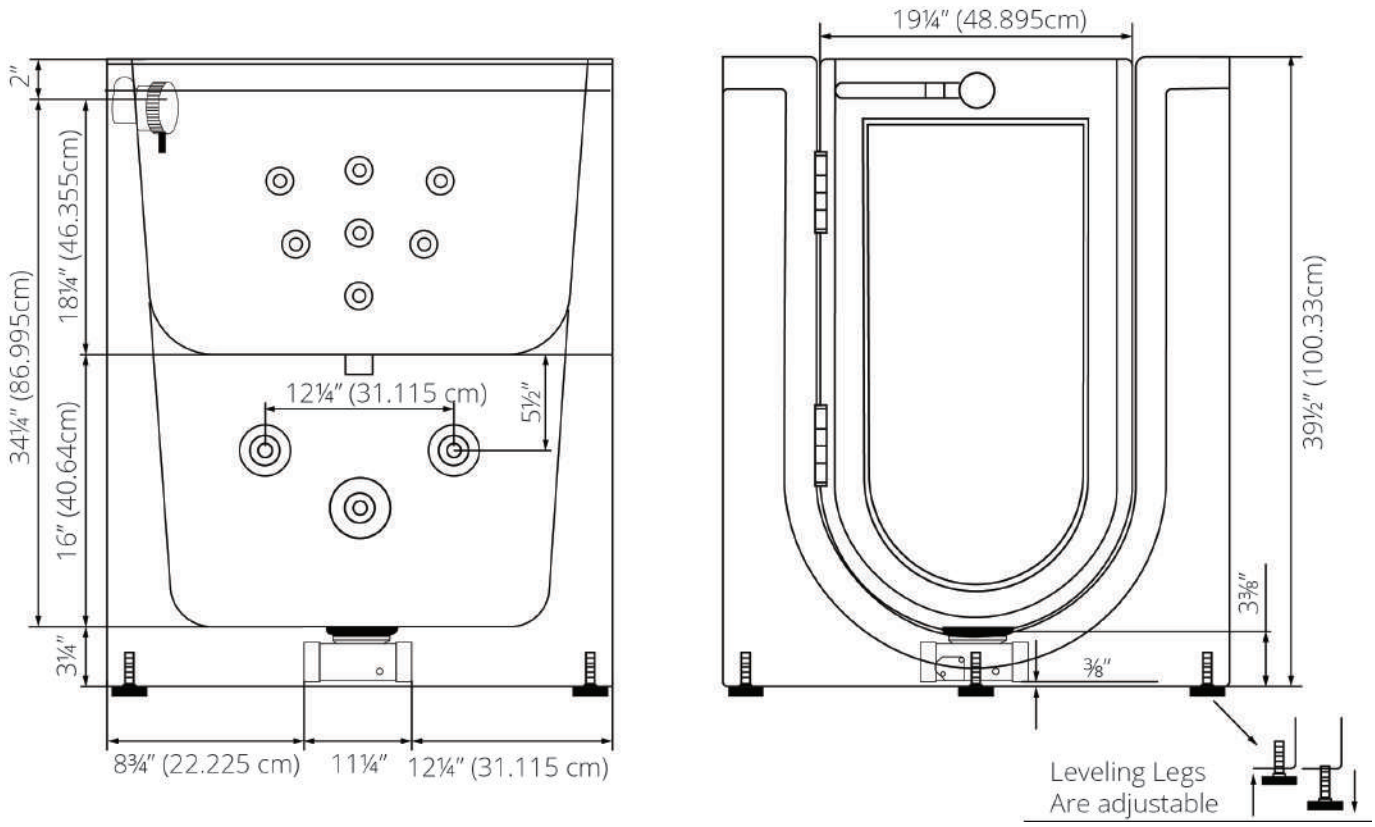

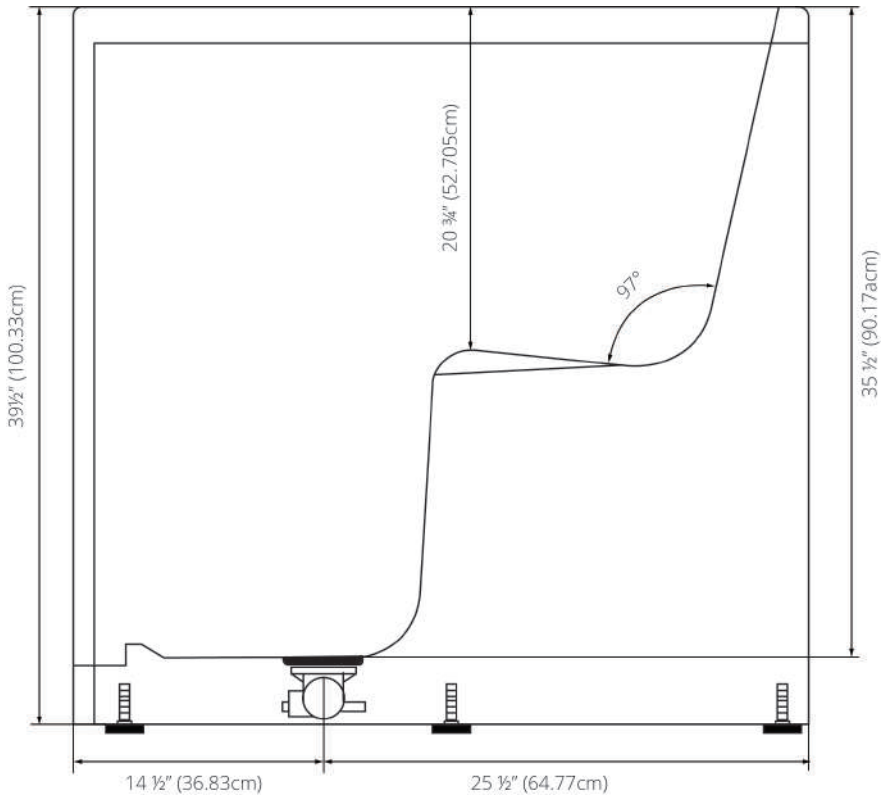


Ella 2" T-Type Single Port Floor Drain


(One Drain Included)

2" T-type Dual Port Floor Drain for Ella Dual Drain Walk-In Bathtubs



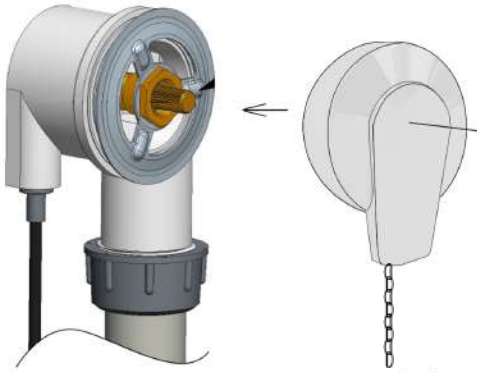



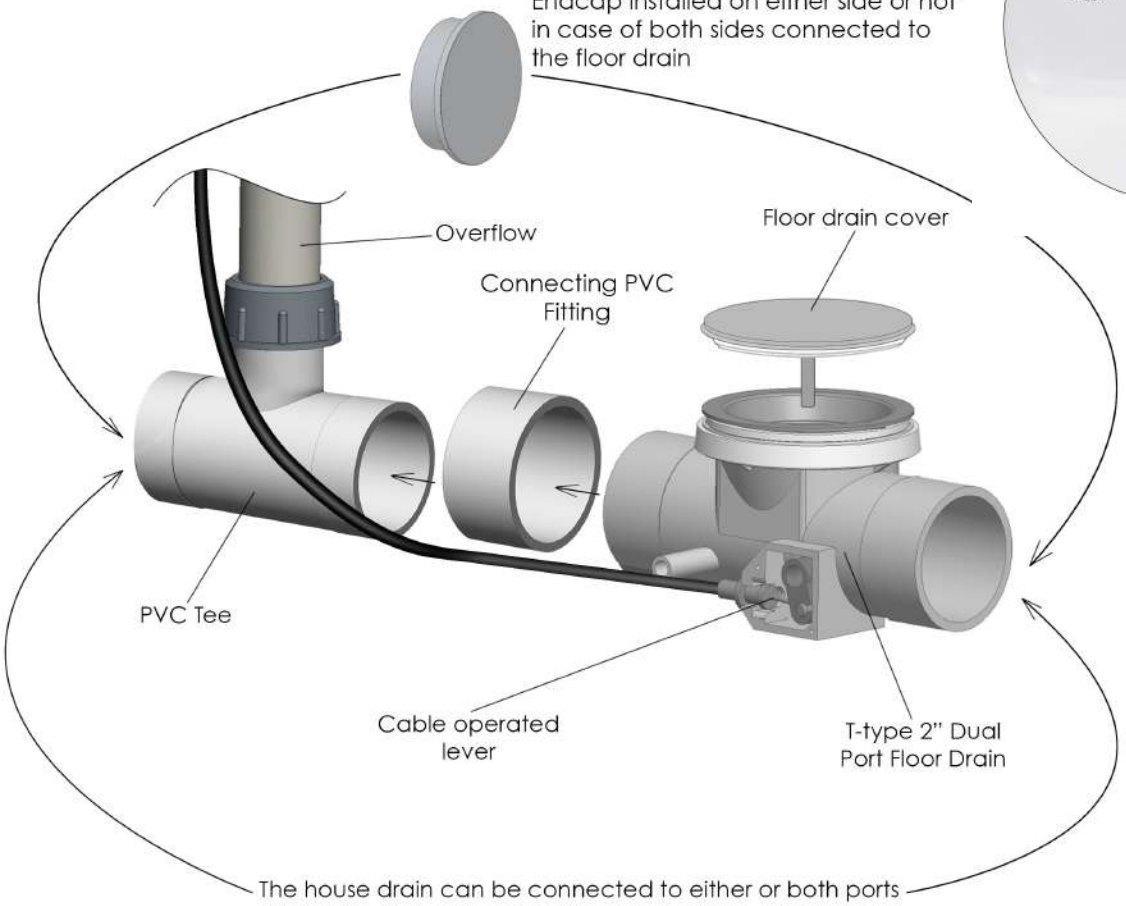

Two 3/4" connector water supply lines included with Ella Fast Fill Faucets

Connect to Shut Off Valves (not included)







All electrical fixtures connect to a dedicated GFCI protected outlet or GFCI protected Circuit Breaker.









Images below show examples of PVC pipe connections (not included). Reducers can be used to connect smaller drain pipes.

T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.

Drain Caps Installed On Either Side Of The Drain unused Port.







Ella 2 Piece Single Lever Fast-Fill Faucet

Description
Solid brass spout chrome finish single lever high flow bathtub faucet with diverter button Two (2) 3/4" 5' braided stainless- steel supply lines. Pull out hand shower mixer with back-flow prevention valve 5 settings and 5' braided hose in a Chrome or Brushed Nickel finish.

Flow


- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 16 GPM (68.1L/min)

Cartridge
- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

Standards
- Third party certified to meet: CSA B125.1, ASMEA112.18.1, ICC117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever/handle
- IAPMO R&T UPC certified




NOTE: This faucet is designed to be installed through 2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, and a 7/8" diagonal hole for the hand shower.

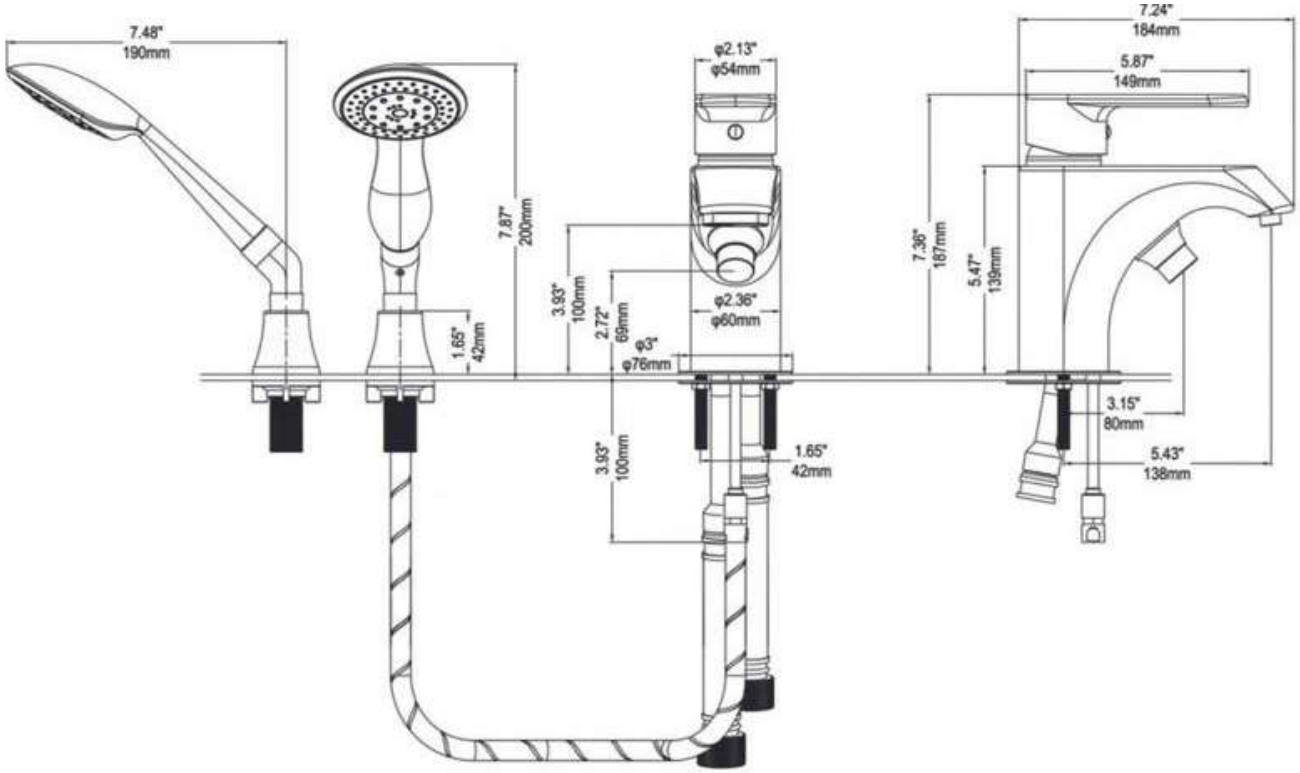

Replacing A Valve Cartridge

Step-by-step Instructions to replace a valve cartridge for Ella 2-piece faucets.


Step.1 Remove the Hot/Cold screw hole cover.

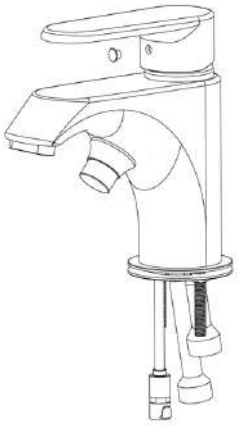


Step.2 Use an Allen wrench to remove the handle Screw.



Step.3 Take out the handle and remove the brass escutcheon



Step.4 Use a wrench to unscrew the pressure cap.



Step.5 Remove the cartridge and replace it with new piece.

