Transfer 26 Acrylic Outward Swing Door Walk-In Bathtub Specifications

Actual Size: 26" x 52" x 40" • (66.04cm x 132.08cm x 101.6cm)

Shipping Size: 29" x 60" x 50" • (73.66cm x 152.4cm x 127cm)

Net Weight: 205lbs • (92.98kg)

Shipping Weight: 300lbs • (136.07kg)

Seat Width: 19" • (48.26cm)

Unoccupied Water Capacity: 75gal • (283.9L)

Occupied Water Capacity: 35-55gal • (132.48 - 308.19L)

Included Features (Soaking)

1. Acrylic shell gloss white finish fiberglass gelcoat reinforced
2. Stainless steel frame with adjustable leveling legs
3. Plastic composite and tempered glass outward swing door with 2 latch gear & shaft mechanism
4. Removable front apron with two access panels
5. One reversible end panel & extension panel 8"
6. Stainless steel chrome finish deck and wall-mounted grab bar
7. Two 2" 4-port PVC drains with 2 end caps included, 2 overflows, 2 stainless steel operated openers with extended handles in chrome finish

Jetting & Therapy Options

1. Air + Hydro (LED Chromatherapy Light Included)
2. Hydro + Hydro Independent Foot Massage (LED Chromatherapy Light Included) *** (2)**
3. Hydro Massage + Microbubble (LED Chromatherapy Light Included)
4. Hydro Massage (LED Chromatherapy Light Not Included)
5. Soaking



Jetting & Therapy Systems

Hydro Massage
•Hydro Massage Pump 7A
•Intensity Dial Air Control
•Ozone Sterilization 0.04A
•22 jets (16 Seat Jets 6 Foot Jets)
•On/Off Push Control
• In-line Water Heater 6A 650W

Hydro + Hydro Foot Massage * (2)
•2 Hydro Massage Pumps 5A + 7A
•2 Intensity Dial Air Controls
•Ozone Sterilization 0.04A
•22 jets (16 Seat Jets 6 Foot Jets)
•On/Off Push Control
•In-Line Water Heater 6A 650W

Hydro+Air Massage
•Air Massage Pump 4.5A 500W
•3 Speed Pump
•Auto-purge (Activates 20 minutes after pump shutdown)
•17 Air Jets (11 Seat Jets 6 Foot Jets)
•11 Hydro Jets (5 Back Jets 6 Foot Jets)

Microbubble Therapy
•1 HP Pump 7.3A
•Pressure Vessel
•On/Off push control
•Agitator Valve

Optional Features
1.Heated Seat and Backrest
2.Digital Controller

Electrical Requirements
Dedicated GFCI protected electrical line(s)required 115/120V 60Hz

Note: LED Chromatherapy light 0.5A with On/Off push control is included with the following dual packages: Hydro + Air, Hydro + Micro, Hydro + Hydro

Disclaimer*: AMP value for each pump may change based on availability. Please verify before purchase. (800.480.6850)

2 Piece Faucet

• Up to 16GPM @ 60PSI (at ideal in-home plumbing conditions)

• Two 5' Water Supply Lines 3/4"


• Pull out Hand Shower in Chrome Finish with a 5' Retractable Stainless Steel Braided Hose


Warranty

• Lifetime limited* warranty on shell, frame, door, and parts to original purchaser/Address
• Labor or installation is not covered - please refer to the Ella warranty certificate
• Non Ella brand faucets covered under manufacturers original warranty

Transfer26 Acrylic Wheelchair Accessible Outward Swing Door Walk-In Bathtub Specifications


RIGHT Door, drain and faucet on the right (as you face the tub)

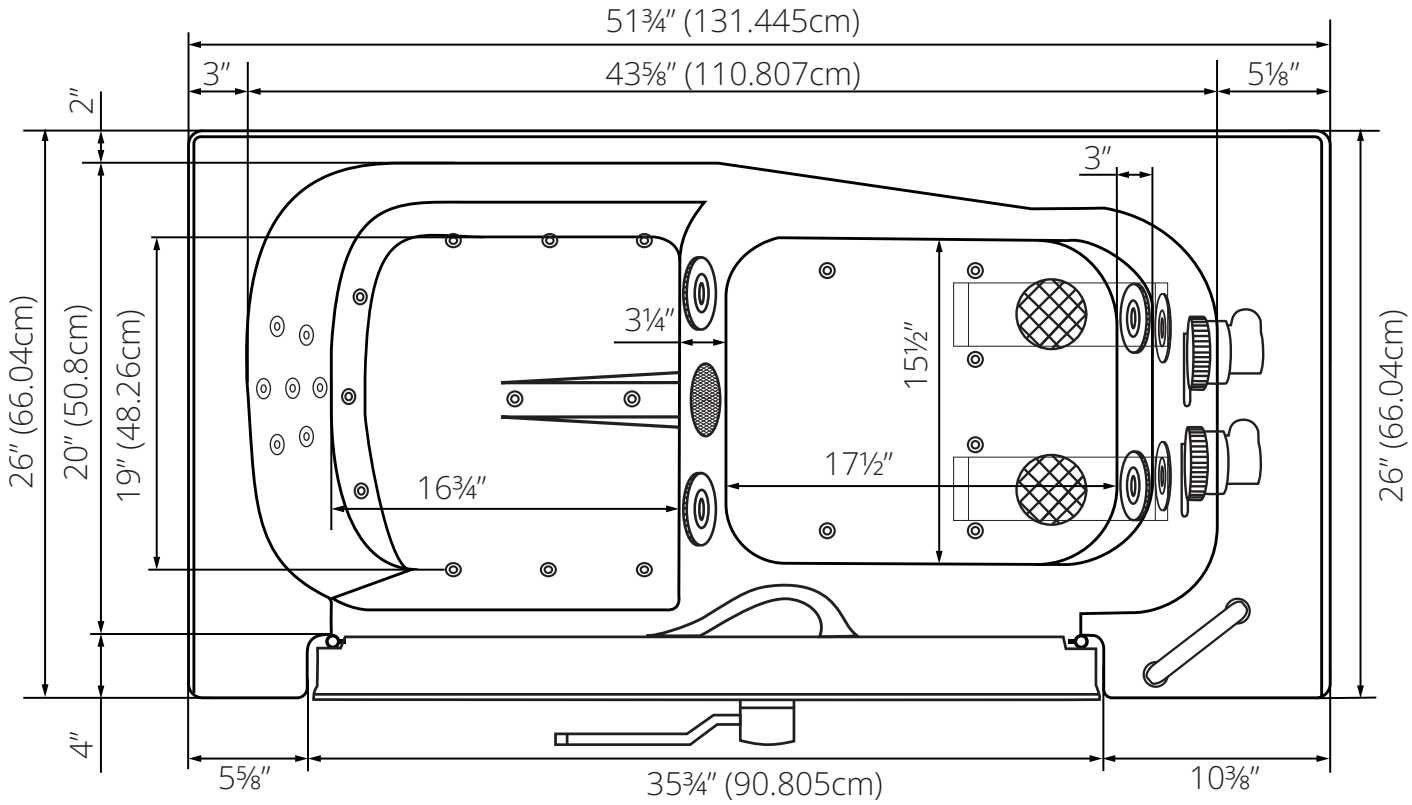


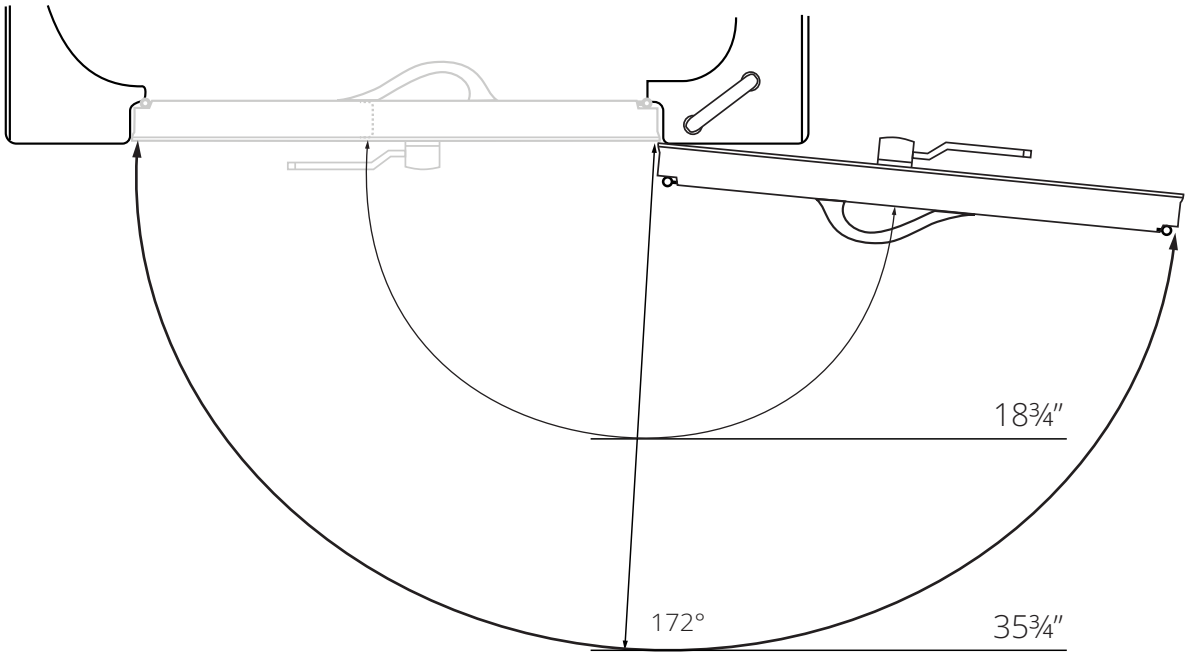


Transfer26 Acrylic Wheelchair Accessible Outward Swing Door Walk-In Bathtub Specifications

RIGHT Door, drain and faucet on the right (as you face the tub)

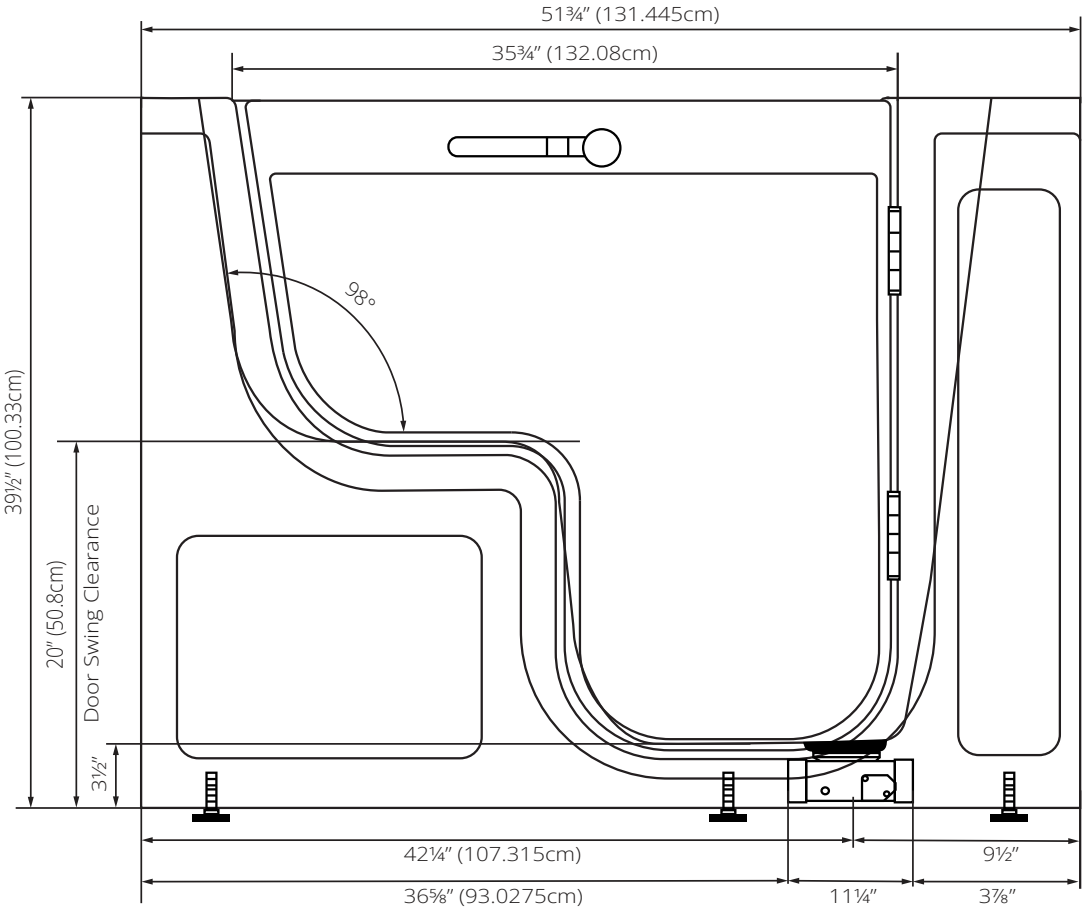

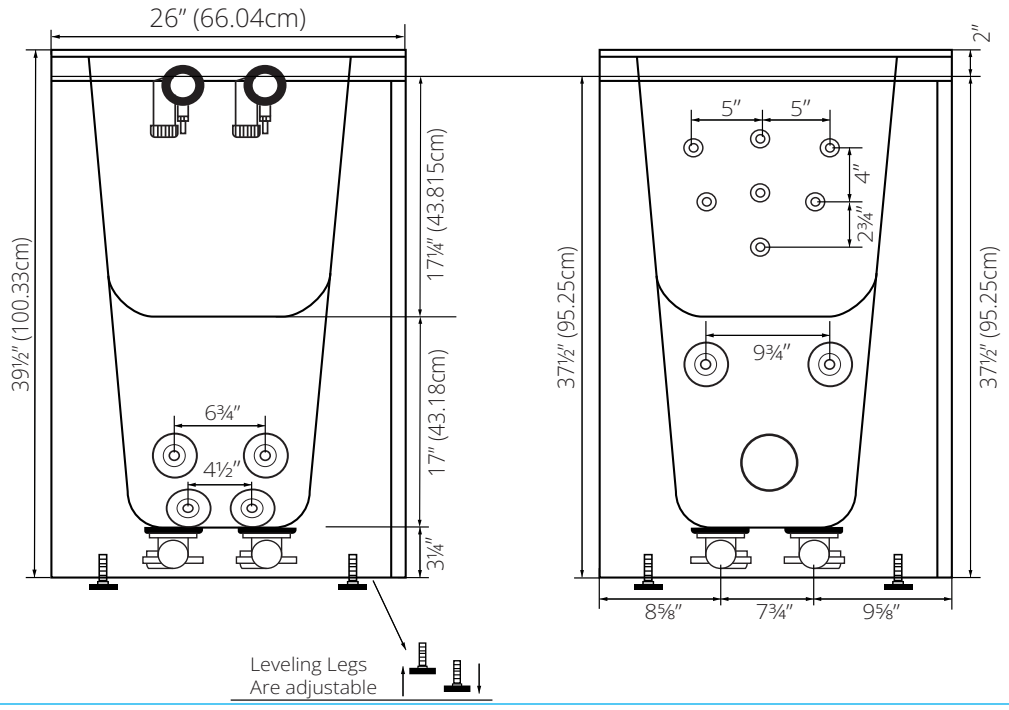

Dual Drain Technology - Two 2 Inch Independent Floor Drains

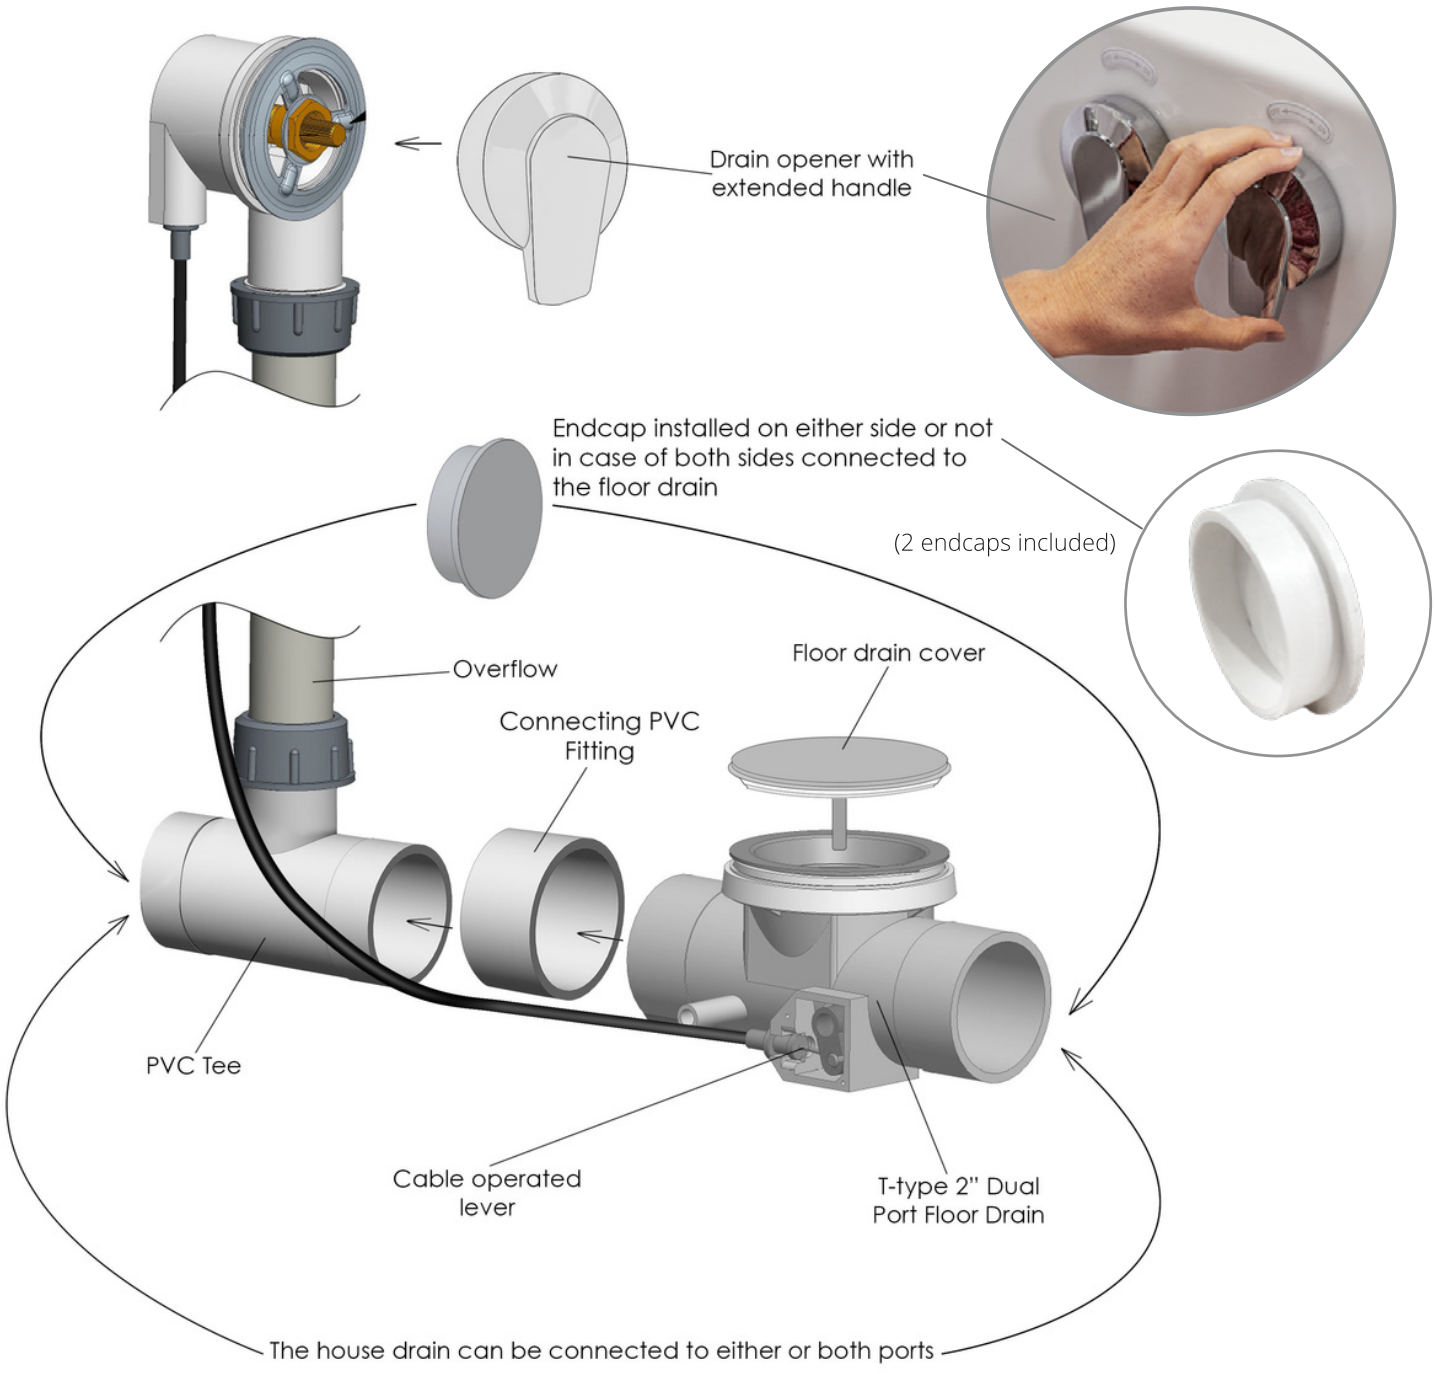

Two 3/4" connector water supply lines included with Ella Fast Fill Faucets

Connect to Shut Off Valves (not included)







All electrical fixtures connect to a dedicated GFCI protected outlet or GFCI protected Circuit Breaker.











Images below show examples of PVC pipe connections (not included). Reducers can be used to connect smaller drain pipes.

T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.

Drain Caps Installed On Either Side Of The Drain unused Port.

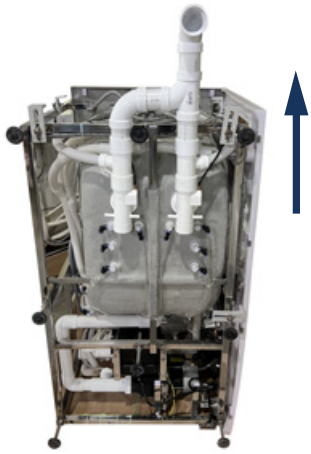

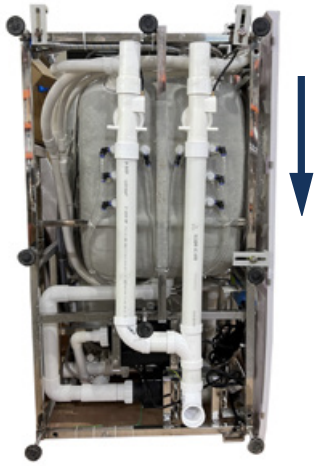



Ella 2 Piece Single Lever Fast-Fill Faucet

Description
Solid brass spout in a chrome finish with a 5-setting pull out hand shower mixer with back-flow prevention valve this includes a 5' braided hose. Two 3/4" 5' braided stainless-steel supply lines are included along with Cold/Hot levers with a diverter for the hand mixer

Flow


- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 16 GPM (68.1L/min)

Cartridge
- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

Standards
- Third party certified to meet: CSA B125.1, ASMEA112.18.1, ICC117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever/handle
- IAPMO R&T UPC certified




NOTE: This faucet is designed to be installed through 2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, and a 7/8" diagonal hole for the hand shower.

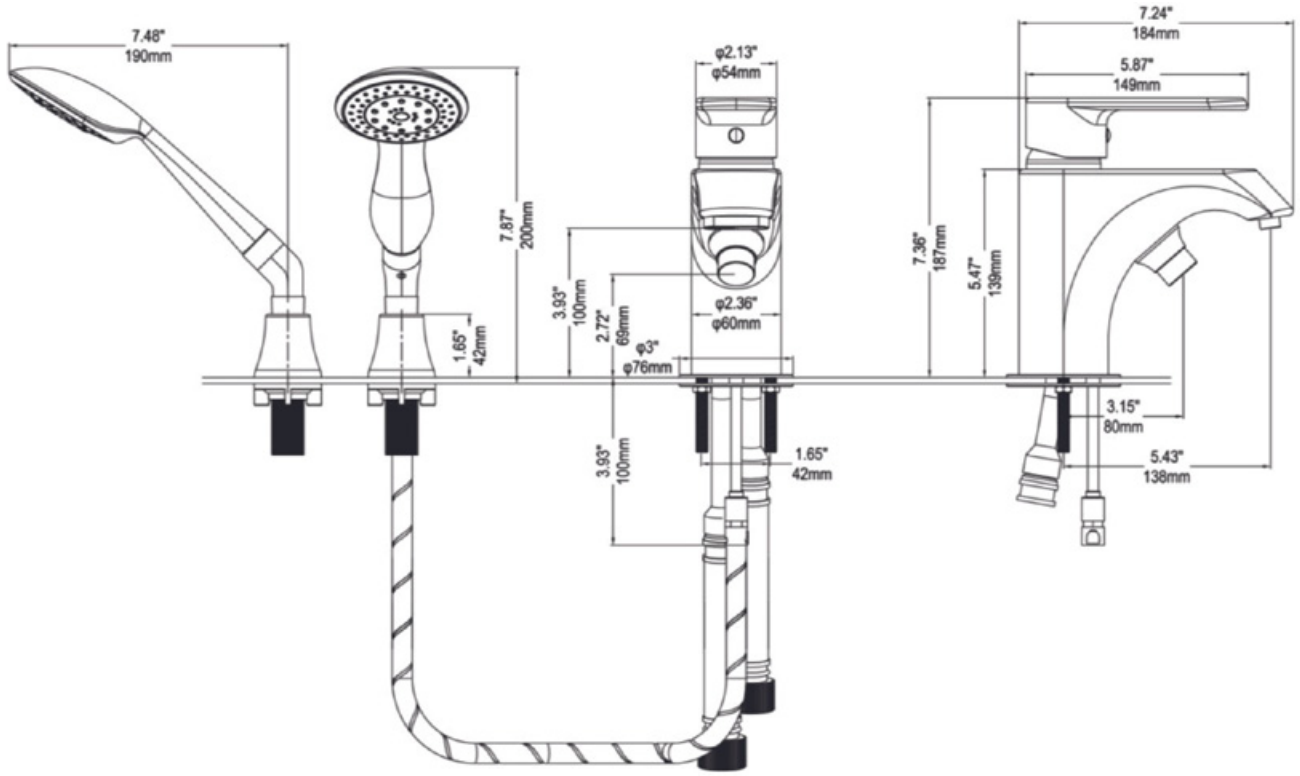


Replacing A Valve Cartridge

Step-by-step Instructions to replace a valve cartridge for Ella 2-piece faucets.


Step.1 Remove the Hot/Cold screw hole cover.

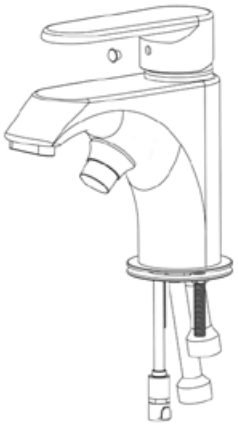


Step.2 Use an Allen wrench to remove the handle Screw.



Step.3 Take out the handle and remove the brass escutcheon



Step.4 Use a wrench to unscrew the pressure cap.



Step.5 Remove the cartridge and replace it with new piece.

