



# Ella Wheelchair Accessible Shower Base

## 60" x 61" Center Drain



### MODEL #

ELB 6061 BF 1.125 C-WH

Outside Dimensions: 60" W x 61" L x 4 1/2" H.  
Shipping Weight: 255 Crated.

### Package Options:

- 24" Grab Bar
- 36" Grab Bar
- 42" Grab Bar
- 24" Chrome Linear Grab Bar
- 36" Chrome Linear Grab Bar
- 42" Chrome linear Grab Bar
- Seat-Padded 32" x 21" with Fold Down Legs
- Slide Bar/Hand Held Shower
- Premium Anti-Bacterial Nylon Weighted Shower Curtain (Off-White)
- Curtain Rod-Stainless Steel
- Collapsible Dam with Horizontal Endcaps-White (for Barrier Free models)
- Collapsible Dam with Vertical Endcaps

### Features:

- White Applied Acrylic
- Self-Supporting & Pre-leveled Base
- Belveled Barrier Free Entry
- No Recess Required
- Textured Slip-Resistant Floor
- Lifetime Warranty

### Codes:



Code compliant when fully equipped  
and installed according to guidelines.

### Accessories:

2" Chrome Strainer, Brass Drain with Friction Seal




2" Chrome Strainer  
Brass Drain with Friction Seal



Manufactured in the United States of America

# Ella Wheelchair Accessible Shower Base

## 60" x 61" Center Drain

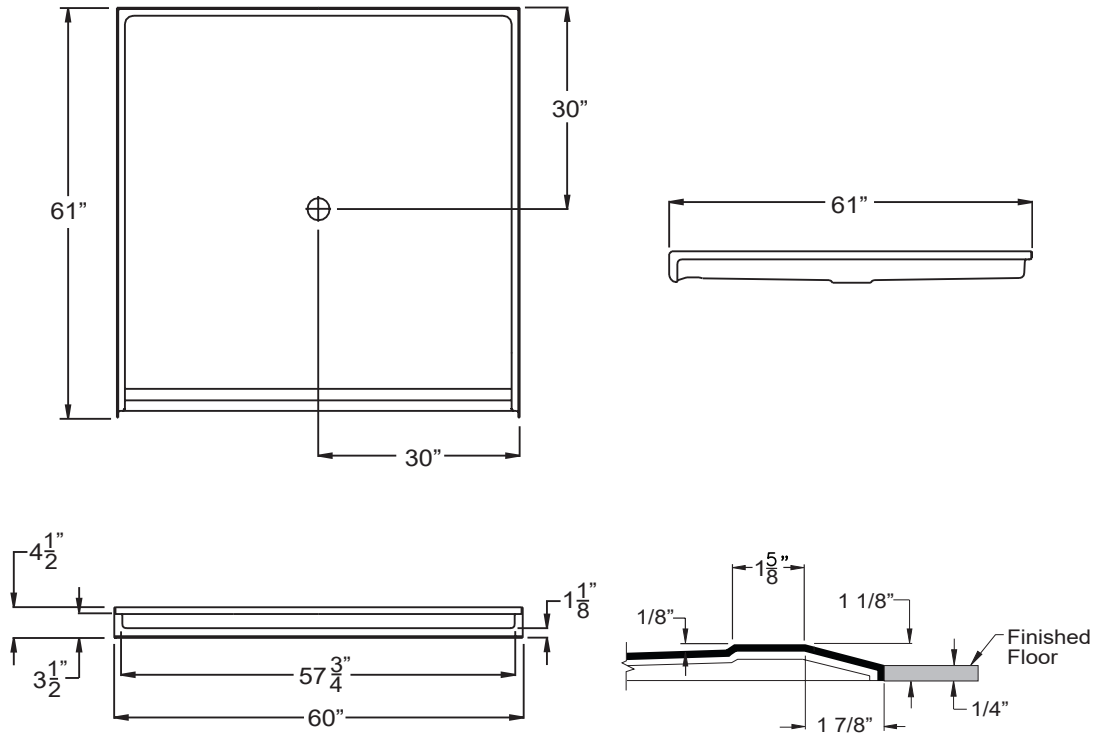

**FEATURES:** Dimensional Tolerance  $\pm \frac{1}{8}$ " Dimensions needed for site preparation should be measured from the unit. Ellas Bubbles assumes no responsibility for prep work.

Model #	Material	Wall Finish	Pieces	Pkg. Wt. w/ Crating lbs.
ELB 6061 BF 1.125 C-WH	AcrylX™	N/A	1	210

### DIMENSIONS

Specifications	Inches
Width:	60
Depth:	61
Height:	4 1/2

### FRAMING DIMENSIONS


Type	D Depth	W Width	H Height	A	B	C
Alcove	61	60 1/4	=	Box Out	30 1/8	30

Discover more products and additional information at


**ellabubbles.com**

Toll Free: 800-480-6850

Office Direct: 312-666-3552

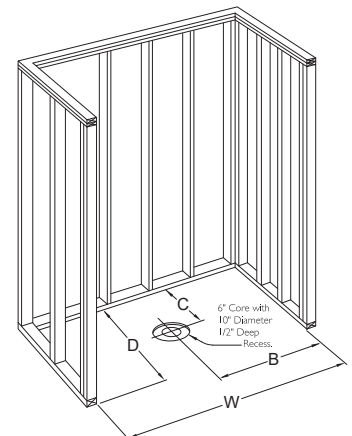

# Ella Wheelchair Accessible Shower Base 60" x 61" Center Drain

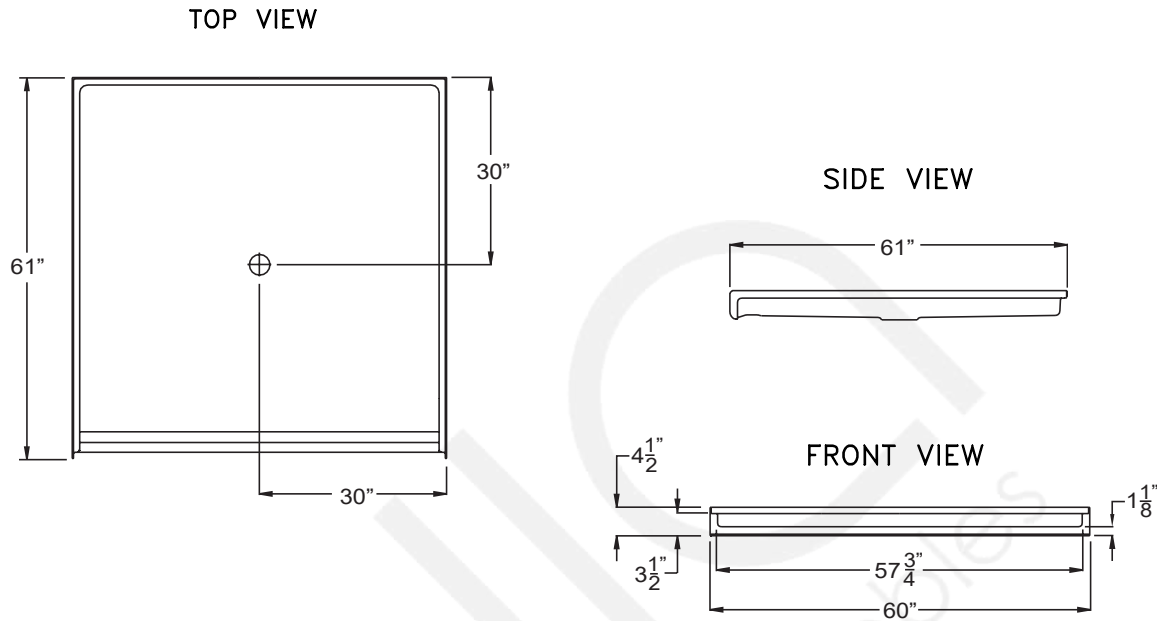


## Ella Wheelchair Accessible Shower Base 60" x 61" Center Drain

The shower enclosure shall be 6061 BF 1 1/8" Pan Center Drain. Finished surface shall be of a sanitary-grade Applied Acrylic exhibiting a minimal thickness of 15 dry mils, and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimensions of 60" x 61" x 4 1/2". The Acrylic pan shall meet ANSI Z124.2, IPC, UPC, and comply with CSA.

The enclosure shall be equipped with the following installed accessories:

- 1) Low entry 1 1/8" Threshold.
- 2) Center Drain Location.
- 3) Integral self-sustaining bottom.

## Detail of 1 1/8" Threshold

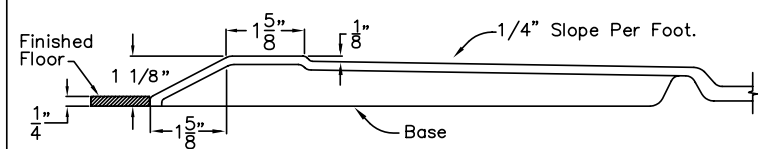

DUE TO THE NATURE OF THE MATERIALS INVOLVED  
UNIT DIMENSIONS MAY VARY +/- 1/2" INCH.